中策橡胶
zc rubber

ZHONGCE RUBBER GROUP CO., LTD.

www.zc-rubber.com

Europe Version 2 Printed in China

中策橡胶
zc rubber

2015/16 TYRE CATALOGUE

Passenger Car, SUV and Light Truck

中策橡胶
zc rubber

- A Company established in Year 1958
- No. 1 Tyre Manufacturer in China
- No. 10 of Top 75 Global Tyre Manufacturers in Year 2014
- Sale revenue reached $4.53 billion in Year 2014

Zhongce Rubber Group Co., Ltd. (ZC-RUBBER) takes great pride in producing tyres that rate among the best in the world. Our corporate philosophy is all about collaboration with our suppliers, with over 10,000 companies who sell our products around the world, and with our millions of end customers who trust our tyres every single day.

Our engineers are working closely together with our international Research and Development (R&D) team, made up of Japanese and Korean experts. We keep on investing millions of US dollars into establishing various production and testing facilities, such as the first noise test laboratorium in China and the MTS Flat-Trac III CT Tyre Test System. Since 2012 ,we joined and maintained the rank of the global top 10 tyre manufacturer.

Our belief in producing quality tyres makes us to set up quality control system approved by both global tyre manufacturers and the famous car makers such as VOLVO, introduce world latest production facilities from world famous equipments supplier such as Fischer, VMI, Krupp, etc, and inspect every single tyre by hand before it leaves the production line besides the X-ray, balancing and uniformity inspection by most advanced equipments imported from Germany, Japan and U.S.A. We guarantee our tyre quality by system, facilities and employees' responsibility.

Manufacturing Bases

PCR & LTR Plant in Xiasha

TBR Plant in Xiasha

Rubber Products Plant in Yonggu

Bias Tyre Plant in Xinanjiang

Advanced Production Facility

Extruding Machine

Germany Fischer Cutting Machine

Germany Krupp Building Machine

Hydraulic Tyre Curing Machine Press

Strict Quality Inspection

ASTEC Tyre Uniformt Testing Machine

Y.MITS Tyre X-ray Inspection Machine

Manual Inspection

R&D Center

VMI Tread Waring Test

Noise Analysis Laboratory

Flat-Trac Test System

Bead Unseating Test

Contents

ULTRA HIGH PERFORMANCE 05-09
SPORT RS SA37 SA07 SA05 SV308

PASSENGER 10-13
RP18 RP28 RP06 H550A

SUV/LTR 14-20
SU318 SV308 SL369 SL366 SL386 SL309

COMMERCIAL LTR 21-26
SC328 SC301 SL305 ST303 ST313 H160 H170

WINTER 27-32
SW658 SW618 SW608 SW601 SW612 SW606

EU TYRE LABEL 33

PRODUCT TECHNICAL DATA 34-40

ATTACHMENT 41-42

SPORT RS

Size	Service Index	Standard Rim			dB	
195/50R15	82V	6.0J	-	-	-	-
▲ 205/50R15 XL	89V	6.5J	-	-	-	-
205/45ZR16 XL	87W	7.0J	-	-	-	-
▲ 225/50R16 XL	89W	7.0J	-	-	-	-
245/40ZR17 XL	95W	8.5J	-	-	-	-
▲ 215/45ZR17 XL	91W	7.0J	-	-	-	-
225/45ZR17 XL	94W	7.5J	-	-	-	-
▲ 235/45ZR17 XL	97W	8.0J	-	-	-	-
265/35ZR18 XL	97W	9.5J	-	-	-	-
▲ 285/35ZR18 XL	101W	10.0J	-	-	-	-
235/40ZR18 XL	95W	8.5J	-	-	-	-

▲ Available in Q2 2015

M+S

RIM SIZE	15 - 18
SERIES	35 - 50
SPEED RATING	V - W

Benefits and Features

- Ideal drifting tyre with special design and components based on competition experiences
- Asymmetric tread design with big pattern blocks and special compound provides superior grip ability
- Continuous center rib generates better grip in dry conditions and enhances high-speed stability

SA37

Size	Service Index	Standard Rim			dB	
▲ 195/45R16 XL	84V	6.5J	C	B	72	2
205/50R16	87W	6.5J	E	B	71	2
225/50R16	92W	7.0J	E	B	71	2
205/55R16	91V	6.5J	E	B	71	2
215/55R16 XL	97W	7.0J	C	B	72	2
225/55R16 XL	99W	7.0J	C	B	72	2
205/40ZR17 XL	84W	7.5J	C	B	72	2
215/40ZR17 XL	87W	7.5J	C	B	72	2
205/45ZR17 XL	88W	7.0J	C	B	72	2
215/45ZR17 XL	91W	7.0J	C	B	72	2
225/45ZR17 XL	94W	7.5J	C	B	72	2
235/45ZR17 XL	97W	8.0J	C	B	72	2
245/45ZR17 XL	99W	8.0J	C	B	72	2
255/45ZR17 XL	102W	8.5J	E	B	73	2
205/50R17 XL	93W	6.5J	C	B	72	2
215/50R17 XL	95W	7.0J	C	B	72	2
225/50R17 XL	98W	7.0J	E	B	72	2
215/55R17 XL	98W	7.0J	C	B	72	2
225/55R17 XL	101W	7.0J	C	B	72	2
235/55R17 XL	103W	7.5J	C	B	72	2
▲ 215/35ZR18 XL	87W	7.5J	C	B	72	2
▲ 255/35ZR18 XL	94W	9.0J	C	B	73	2
▲ 215/40ZR18 XL	89W	7.5J	C	B	72	2
▲ 225/40ZR18 XL	92W	8.0J	C	B	72	2
235/40ZR18 XL	95W	8.5J	C	B	72	2
215/45ZR18 XL	93W	7.0J	C	B	72	2
225/45ZR18 XL	95W	7.5J	C	B	72	2
245/45ZR18 XL	100W	8.0J	C	B	72	2
235/50R18 XL	101V	7.5J	C	B	72	2
▲ 215/35ZR19 XL	85W	7.5J	C	B	72	2
▲ 225/35ZR19 XL	88W	8.0J	C	B	72	2

▲ Available in Q2 2015

M+S

RIM SIZE	16 - 19
SERIES	35 - 55
SPEED RATING	V - W

Benefits and Features

- New generation of asymmetric ultra high performance tyre for summer
- SILICA TECH compound helps to enhance wet grip providing shorter braking distance
- Strong center rib guarantees excellent handling on both wet and dry roads and on-center feel.

SA07

Size	Service Index	Standard Rim			dB	
◆ 195/45R16 XL	84V	6.5J	E	E	72	2
205/55R16	91V	6.5J	E	E	71	2
215/55R16	93V	7.0J	E	E	71	2
225/55R16	95W	7.0J	E	E	71	2
◆ 205/40ZR17 XL	84W	7.5J	E	E	72	2
215/40ZR17 XL	87W	7.5J	E	E	72	2
245/40ZR17 XL	95W	8.5J	E	E	72	2
◆ 205/45ZR17 XL	88W	7.0J	E	E	72	2
215/45ZR17 XL	91W	7.0J	E	E	72	2
225/45ZR17 XL	94W	7.5J	E	E	72	2
235/45ZR17 XL	97W	8.0J	E	E	72	2
245/45ZR17	95Y	8.0J	E	E	71	2
255/45ZR17	98W	8.5J	E	E	72	2
205/50R17	89W	6.5J	E	E	71	2
215/50R17	91W	7.0J	E	E	71	2
225/50R17	94W	7.0J	E	E	71	2
◆ 235/50R17 XL	99W	7.5J	E	E	72	2
215/55R17	94V	7.0J	E	E	71	2
225/55R17	97W	7.0J	E	E	71	2
235/55R17	99W	7.5J	E	E	71	2
215/35ZR18 XL	84W	7.5J	E	E	72	2
▲ 225/35ZR18 XL	87W	8.0J	E	E	72	2
▲ 255/35ZR18 XL	94W	9.0J	E	E	73	2
▲ 265/35ZR18 XL	97W	9.5J	E	E	73	2
◆ 215/40ZR18 XL	89W	7.5J	E	E	72	2
225/40ZR18 XL	92W	8.0J	E	E	72	2
235/40ZR18 XL	95W	8.5J	E	E	72	2
245/40ZR18 XL	97Y	8.5J	E	E	72	2
215/45ZR18	89W	7.0J	E	E	71	2
225/45ZR18 XL	95W	7.5J	E	E	72	2
235/45ZR18	94Y	8.0J	E	E	71	2
245/45ZR18	96Y	8.0J	E	E	71	2
235/50R18 XL	101W	7.5J	E	E	72	2
245/50R18	100Y	7.5J	E	E	71	2
▲ 265/30ZR19 XL	93W	9.5J	E	E	73	2
▲ 275/30ZR19 XL	96W	9.5J	E	E	73	2
▲ 215/35ZR19 XL	85W	7.5J	E	E	72	2
▲ 225/35ZR19 XL	88W	8.0J	E	E	72	2
235/35ZR19 XL	91W	8.5J	E	E	72	2
245/35ZR19 XL	93W	8.5J	E	E	72	2
255/35ZR19 XL	96W	9.0J	E	E	73	2
◆ 225/40ZR19 XL	93W	8.0J	E	E	72	2
245/40ZR19	94Y	8.5J	E	E	71	2
255/40ZR19 XL	100W	9.0J	E	E	73	2
245/35ZR20 XL	95W	8.5J	E	E	72	2
265/50R20 XL	111V	8.5J	E	E	73	2

◆ Available in Q1 2015 ▲ Available in Q2 2015

M+S

RIM SIZE	16 - 20
SERIES	30 - 55
SPEED RATING	V - Y



Benefits and Features

- Premium performance tyres for sedans and race cars
- SILICA TECH was adopted for low rolling resistance and precise control
- RIM PROTECTOR protects the wheel rim and provides superior handling control and enhanced cornering

SA05

Size	Service Index	Standard Rim			dB	
195/50R15	82V	6.0J	E	C	74	3
185/55R15	82V	6.0J	E	C	74	3
195/55R15	85V	6.0J	E	C	74	3
205/45ZR16 XL	87W	7.0J	E	C	74	3
205/50R16	87W	6.5J	E	C	74	3
225/50R16	92W	7.0J	E	C	74	3
205/55R16 XL	94W	6.5J	E	C	74	3
215/55R16 XL	97W	7.0J	E	C	74	3
225/55R16 XL	99W	7.0J	E	C	74	3
205/40ZR17 XL	84W	7.5J	E	C	74	3
215/40ZR17 XL	87W	7.5J	E	C	74	3
205/45ZR17 XL	88W	7.0J	E	C	74	3
215/45ZR17 XL	91W	7.0J	E	C	74	3
225/45ZR17 XL	94W	7.5J	E	C	74	3
235/45ZR17 XL	97W	8.0J	E	C	74	3
205/50R17 XL	93W	6.5J	E	C	74	3
215/50R17 XL	95W	7.0J	E	C	74	3
225/50R17 XL	98W	7.0J	E	C	74	3
215/55R17 XL	98W	7.0J	E	C	74	3
225/55R17 XL	101W	7.0J	E	C	74	3
235/55R17 XL	103W	7.5J	E	C	74	3
235/40ZR18 XL	95W	8.5J	E	C	74	3

M+S

RIM SIZE	15 - 18
SERIES	40 - 55
SPEED RATING	V - W

Benefits and Features

- Asymmetric tread design increases cornering stability for better all-season performance
- SILICA TECH maximizes contact between the tyre and road for enhanced grip in wet and dry conditions
- Two wide circumferential grooves quickly and efficiently evacuate water evacuation for enhanced wet traction

SV308

Size	Service Index	Standard Rim			dB	
195/50R15	82V	6.0J	C	C	72	3
185/55R15	82V	6.0J	E	C	72	3
195/55R15	85V	6.0J	E	C	72	3
205/45ZR16 XL	87W	7.0J	C	C	72	3
205/50R16	87W	6.5J	C	C	72	3
225/50R16	92W	7.0J	C	C	72	3
205/55R16 XL	94W	6.5J	C	C	72	3
215/55R16 XL	97W	7.0J	C	C	72	3
225/55R16 XL	99W	7.0J	C	C	72	3
205/40ZR17 XL	84W	7.5J	C	C	72	3
215/40ZR17 XL	87W	7.5J	C	C	72	3
205/45ZR17 XL	88W	7.0J	C	C	72	3
215/45ZR17 XL	91W	7.0J	C	C	72	3
225/45ZR17 XL	94W	7.5J	C	C	72	3
235/45ZR17 XL	97W	8.0J	C	C	72	3
205/50R17 XL	93W	6.5J	C	C	72	3
215/50R17 XL	95W	7.0J	C	C	72	3
225/50R17 XL	98W	7.0J	C	C	72	3
215/55R17 XL	98W	7.0J	C	C	72	3
225/55R17 XL	101W	7.0J	C	C	72	3
235/55R17 XL	103W	7.5J	C	C	72	3
225/40ZR18 XL	92W	8.0J	E	C	75	3
235/40ZR18 XL	95W	8.5J	E	C	75	3
245/30ZR20 XL	90W	8.5J	E	C	75	3

M+S

RIM SIZE	15 - 20
SERIES	30 - 55
SPEED RATING	V - W

Benefits and Features

- All season Silica-based compound for improving wet and dry traction without sacrificing treadwear
- RIM PROTECTOR protects the wheel rim and helps resist lateral deflection while providing superior handling control and enhanced cornering
- Circumferential V-groove promote proper water drainage without impacting cornering grip
- Solid center rib provides stable on-center feel and outstanding wet traction during cornering

RP18

Size	Service Index	Standard Rim			dB	
175/70R13	82T	5.0B	E	E	70	2
185/70R13	86T	5.5J	E	E	70	2
155/80R13	79T	4.5B	E	E	70	2
165/80R13	83T	4.5B	E	E	70	2
185/60R14	82H	5.5J	E	E	70	2
195/60R14	86H	6.0J	E	E	71	2
175/65R14	82H	5.0J	E	E	70	2
185/65R14	86H	5.5J	E	E	70	2
165/70R14	81T	5.0J	E	E	70	2
175/70R14	84T	5.0J	E	E	70	2
185/70R14	88T	5.5J	E	E	70	2
195/70R14	91T	6.0J	E	E	71	2
205/70R14	95T	6.0J	E	E	71	2
175/80R14	88T	5.0J	E	E	70	2
185/80R14	91T	5.0J	E	E	70	2
195/50R15	82V	6.0J	E	E	71	2
195/55R15	85V	6.0J	E	E	71	2
185/60R15	84H	5.5J	E	E	70	2
195/60R15	88H	6.0J	E	E	71	2
205/60R15	91H	6.0J	E	E	71	2
215/60R15	94H	6.5J	E	E	71	2
185/65R15	88H	5.5J	E	E	70	2
195/65R15	91H	6.0J	E	E	71	2
205/65R15	94H	6.0J	C	E	71	2
215/65R15	96H	6.5J	E	E	71	2
205/70R15	96H	6.0J	C	E	71	2
215/70R15	98H	6.5J	C	E	71	2
205/50R16	87V	6.5J	E	E	71	2
205/55R16	91V	6.5J	E	E	71	2
195/60R16	89H	6.0J	C	E	71	2
205/60R16	92H	6.0J	C	E	71	2
215/60R16	95H	6.5J	C	E	71	2
225/60R16	98H	6.5J	C	E	71	2
235/60R16	100H	7.0J	C	E	71	2
205/65R16	95H	6.0J	E	E	71	2
215/65R16	98H	6.5J	C	E	71	2
225/65R16	100H	6.5J	C	E	71	2
235/65R16	103H	7.0J	C	E	71	2

WEST LAKE only

M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V



Benefits and Features

- Premium all-season touring tyres with M+S rated offering consistent highway performance
- Improved tyre structure guarantees a comfort and smooth ride
- CAD designed tyre tread helps to reduce road noise significantly
- Remarkable handling on dry and wet road surface

RP28

Size	Service Index	Standard Rim			dB	
155/70R13	75T	4.5B	E	C	70	2
165/70R13	79T	5.0B	E	C	70	2
175/70R13	82T	5.0B	E	C	70	2
185/70R13	86T	5.5J	E	C	70	2
155/80R13	79T	4.5B	E	C	70	2
165/80R13	83T	4.5B	E	C	70	2
185/55R14	80V	6.0J	E	C	70	2
165/60R14	75H	5.0J	E	C	70	2
175/60R14	79H	5.0J	E	C	70	2
185/60R14	82H	5.5J	E	C	70	2
195/60R14	86H	6.0J	C	C	71	2
205/60R14	88H	6.0J	C	C	71	2
155/65R14	75T	4.5J	E	C	70	2
◆ 165/65R14	79T	5.0J	E	C	70	2
175/65R14	82H	5.0J	E	C	70	2
185/65R14	86H	5.5J	C	C	70	2
195/65R14	89H	6.0J	C	C	71	2
165/70R14	81T	5.0J	E	C	70	2
175/70R14	84T	5.0J	C	C	70	2
185/70R14	88T	5.5J	C	C	70	2
195/70R14	91T	6.0J	C	C	71	2
205/70R14	95T	6.0J	C	C	71	2
195/50R15	82V	6.0J	E	C	71	2
185/55R15	82V	6.0J	E	C	70	2
195/55R15	85V	6.0J	E	C	71	2
175/60R15	81H	5.0J	C	C	70	2
185/60R15	84H	5.5J	C	C	70	2
195/60R15	88H	6.0J	C	C	71	2
205/60R15	91H	6.0J	C	C	71	2
215/60R15	94H	6.5J	C	C	71	2
165/65R15	81H	5.0J	E	C	70	2
175/65R15	84H	5.0J	C	C	70	2
185/65R15	88H	5.5J	C	C	70	2
195/65R15	91H	6.0J	C	C	71	2
205/65R15	94H	6.0J	C	C	71	2
215/65R15	96H	6.5J	C	C	71	2
205/70R15	96H	6.0J	C	C	71	2
215/70R15	98H	6.5J	C	C	71	2
195/50R16	84V	6.0J	E	C	71	2
205/50R16	87V	6.5J	E	C	71	2
185/55R16	83V	6.0J	E	C	70	2
195/55R16	87V	6.0J	E	C	71	2
205/55R16	91V	6.5J	C	C	71	2
215/55R16	93V	7.0J	C	C	71	2
225/55R16	95V	7.0J	C	C	71	2
195/60R16	89H	6.0J	C	C	71	2
205/60R16	92H	6.0J	C	C	71	2
215/60R16	95H	6.5J	C	C	71	2
225/60R16	98H	6.5J	C	C	71	2
235/60R16	100H	7.0J	C	C	71	2
205/65R16	95H	6.0J	C	C	71	2
215/65R16	98H	6.5J	C	C	71	2
225/65R16	100H	6.5J	C	C	71	2
◆ 235/65R16	103H	7.0J	C	C	71	2

◆ Available in Q1 2015

M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V



Benefits and Features

- A comfortable ride premium touring tyre
- Computer aided designed tread offering low noise and excellent water drainage
- SILICA TECH compounding technology ensuring low rolling resistance and saving fuel expenditure
- Improved shoulder sipes providing better handling during cornering

SP06

Size	Service Index	Standard Rim			dB	
155/65R13	73T	4.5B	F	C	72	3
165/65R13	77T	5.0B	E	C	72	3
155/70R13	75T	4.5B	E	C	72	3
165/70R13	79T	5.0B	E	C	72	3
175/70R13	82T	5.0B	E	C	72	3
185/70R13	86T	5.5J	E	C	72	3
155/80R13	79T	4.5B	E	C	72	3
165/80R13	83T	4.5B	E	C	72	3
165/60R14	75T	5.0J	E	C	72	3
185/60R14	82H	5.5J	E	C	72	3
195/60R14	86H	6.0J	E	C	74	3
155/65R14	75T	4.5B	E	C	72	3
175/65R14	82H	5.0J	E	C	72	3
185/65R14	86H	5.5J	E	C	72	3
165/70R14	81T	5.0J	E	C	72	3
175/70R14	84T	5.0J	E	C	72	3
185/70R14	88T	5.5J	E	C	72	3
195/70R14	91T	6.0J	E	C	74	3
205/70R14	95T	6.0J	E	C	74	3
175/80R14	88T	5.0J	E	C	72	3
185/80R14	91T	5.0J	E	C	72	3
195/50R15	82V/H	6.0J	E	C	74	3
195/55R15	85V	6.0J	E	C	74	3
185/60R15	84H	5.5J	E	C	72	3
195/60R15	88H	6.0J	E	C	74	3
205/60R15	91H	6.0J	E	C	74	3
215/60R15	94H	6.5J	E	C	74	3
185/65R15	88H	5.5J	E	C	72	3
195/65R15	91H	6.0J	E	C	74	3
205/65R15	94H	6.0J	E	C	74	3
215/65R15	96H	6.5J	E	C	74	3
205/70R15	96H	6.0J	E	C	74	3
215/70R15	98H	6.5J	E	C	74	3
205/50R16	87V	6.5J	E	C	74	3
205/55R16	91H	6.5J	E	C	74	3
205/60R16	92H	6.0J	E	C	74	3
215/60R16	95H	6.5J	E	C	74	3
225/60R16	98H	6.5J	E	C	74	3
235/60R16	100H	7.0J	E	C	74	3
205/65R16	95H	6.0J	E	C	74	3
215/65R16	98H	6.5J	E	C	74	3
225/65R16	100H	6.5J	E	C	74	3
235/65R16	103H	7.0J	E	C	74	3

M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V

Benefits and Features

- Perfect Balance of High Performance and High Value
- All-seaon, comfortable ride, long tread life and excellent performance
- Stable on-center feel and outstanding wet traction during cornering
- Improved shoulder sipes to combat uneven wearing

H550A

Size	Service Index	Standard Rim			dB	
155/65R13	73T	4.5B	F	C	72	3
165/65R13	77T	5.0B	F	C	72	3
155/70R13	75T	4.5B	F	C	72	3
165/70R13	79T	5.0B	F	C	72	3
175/70R13	82T	5.0B	F	C	72	3
185/70R13	86T	5.5J	F	C	72	3
155/80R13	79T	4.5B	F	C	72	3
165/80R13	83T	4.5B	F	C	72	3
185/60R14	82H	5.5J	F	C	72	3
195/60R14	86H	6.0J	F	C	72	3
175/65R14	82H	5.0J	F	C	72	3
185/65R14	86H	5.5J	F	C	72	3
165/70R14	81T	5.0J	F	C	72	3
175/70R14	84T	5.0J	F	C	72	3
185/70R14	88T	5.5J	F	C	72	3
195/70R14	91T	6.0J	F	C	72	3
205/70R14	95T	6.0J	F	C	72	3
175/80R14	88T	5.0J	F	C	72	3
185/80R14	91T	5.0J	F	C	72	3
195/50R15	82V	6.0J	F	C	72	3
195/55R15	85V	6.0J	F	C	72	3
185/60R15	84H	5.5J	F	C	72	3
195/60R15	88H	6.0J	F	C	72	3
205/60R15	91H	6.0J	F	C	72	3
185/65R15	88H	5.5J	F	C	72	3
195/65R15	91H	6.0J	F	C	72	3
205/65R15	94H	6.0J	F	C	72	3
215/65R15	96H	6.5J	F	C	72	3
205/70R15	96H	6.0J	F	C	72	3
215/70R15	98H	6.5J	F	C	72	3
205/50R16	87V	6.5J	F	C	72	3
205/55R16	91H	6.5J	F	C	72	3
205/60R16	92H	6.0J	F	C	72	3
215/60R16	95H	6.5J	F	C	72	3
225/60R16	98H	6.5J	F	C	72	3
235/60R16	100H	7.0J	F	C	72	3
205/65R16	95H	6.0J	F	C	72	3
215/65R16	98H	6.5J	F	C	72	3
225/65R16	100H	6.5J	F	C	72	3

M+S

RIM SIZE	13 - 16
SERIES	50 - 80
SPEED RATING	T - V

Benefits and Features

- Improved tyre structure compared to competitor for longer tyre life and more comfort ride
- Lower rolling resistance for improved fuel economy

SU318

Size	Service Index	Standard Rim			dB	
225/70R15	100T	6.5J	E	C	71	2
235/70R15	103T	7.0J	E	C	71	2
265/70R15	112T	8.0J	C	C	72	2
215/75R15	100T	6.0J	E	C	71	2
225/75R15	102T	6.0J	E	C	71	2
235/75R15	105T	6.5J	E	C	71	2
265/75R15	112T	7.5J	C	C	72	2
255/65R16	109T	7.5J	C	C	72	2
215/70R16	100H	6.5J	E	C	71	2
225/70R16	103T	6.5J	E	C	71	2
235/70R16	106T	7.0J	E	C	71	2
245/70R16 XL	111T	7.0J	E	C	72	2
255/70R16	111T	7.5J	C	C	72	2
265/70R16	112T	8.0J	C	C	72	2
275/70R16	114T	8.0J	C	C	72	2
225/75R16	104T	6.0J	E	C	71	2
235/75R16	108T	6.5J	E	C	71	2
245/75R16	111T	7.0J	E	C	71	2
265/75R16	116T	7.5J	C	C	72	2
215/60R17	96H	6.5J	E	C	71	2
225/60R17	99T	6.5J	E	C	71	2
235/60R17	102T	7.0J	E	C	71	2
255/60R17 XL	110V	7.5J	C	C	73	2
265/60R17	108T	8.0J	C	C	72	2
275/60R17	110T	8.0J	C	C	72	2
215/65R17	99T	6.5J	E	C	71	2
225/65R17	102T	6.5J	E	C	71	2
235/65R17	104T	7.0J	E	C	71	2
245/65R17	107T	7.0J	E	C	71	2
255/65R17	110H	7.5J	C	C	72	2
265/65R17	112T	8.0J	C	C	72	2
275/65R17	115T	8.0J	C	C	72	2
285/65R17	116H	8.5J	C	C	74	2
245/70R17	110T	7.0J	E	C	71	2
255/70R17	112T	7.5J	C	C	72	2
265/70R17	115T	8.0J	C	C	72	2
235/55R18	100V	7.5J	E	C	71	2
255/55R18 XL	109V	8.0J	C	C	73	2
225/60R18	100H	6.5J	E	C	71	2
235/60R18	103V	7.0J	E	C	71	2
◆ 245/60R18	105T	7.0J	E	C	71	2
255/60R18 XL	112V	7.5J	C	C	73	2
265/60R18 XL	114V	8.0J	C	C	73	2
285/60R18	116H	8.5J	C	C	74	2
◆ 235/65R18	106H	7.0J	E	C	71	2
◆ 265/65R18	114T	8.0J	C	C	72	2
◆ 275/65R18	116T	8.0J	C	C	72	2
◆ 255/70R18	113T	7.5J	C	C	72	2
◆ 265/70R18	116T	8.0J	C	C	72	2
275/45R19 XL	108V	9.0J	C	C	73	2
255/50R19 XL	107V	8.0J	C	C	73	2
◆ 255/55R19 XL	111V	8.0J	C	C	73	2
275/40R20 XL	106V	9.5J	C	C	73	2
◆ 275/45R20 XL	110V	9.0J	C	C	73	2
275/55R20 XL	117V	8.5J	C	C	73	2
▲ 275/60R20	115H	8.0J	C	C	72	2

◆ Available in Q1 2015 ▲ Available in Q2 2015

M+S

RIM SIZE	15 - 20
SERIES	40 - 75
SPEED RATING	T - V



Benefits and Features

- Ideal H/T tyre integrated outstanding on-road comfort and wet traction safety as a whole
- Four longitude grooves combined with wind sipes ensure excellent water evacuation and wet traction performance
- SILICA TECH adopted for better wet grip as well as low rolling resistance
- Re-constructed steel bead wire improves driving comfort effectively

SV308

Size	Service Index	Standard Rim			dB	
255/55R18	105H	8.0J	E	C	75	3
265/60R18	110H	8.0J	E	C	75	3
275/45R20 XL	110H	9.0J	E	C	75	3
285/50R20	112H	9.0J	E	C	75	3
275/55R20 XL	117H	8.5J	E	C	75	3
265/35R22	98H	9.5J	E	C	75	3
305/40R22	110H	11.0J	E	C	75	3
305/45R22	118H	10.0J	E	C	75	3
305/35R24	112H	11.0J	E	C	75	3

M+S

RIM SIZE	18 - 24
SERIES	35 - 60
SPEED RATING	H

Benefits and Features

- All season Silica-based compound for improving wet and dry traction without sacrificing tread wear
- RIM PROTECTOR protects the wheel rim and helps resist lateral deflection while providing superior handling control and enhanced cornering
- Circumferential V-groove promote proper water drainage without impacting cornering grip
- Solid center rib provides stable on-center feel and outstanding wet traction during cornering

SL369

Size	Service Index	Standard Rim			dB	
▲ 205/65R15	94H	6.0J	-	-	-	-
▲ 205/70R15	96H	6.0J	-	-	-	-
215/75R15	100S	6.0J	-	-	-	-
235/75R15 XL	109S	6.5J	-	-	-	-
▲ 205/60R16	92H	6.0J	-	-	-	-
215/70R16	100S	6.5J	-	-	-	-
225/70R16	103S	6.5J	-	-	-	-
235/70R16	106S	7.0J	-	-	-	-
◆ 245/70R16 XL	111S	7.0J	-	-	-	-
▲ 255/70R16	111T	7.5J	-	-	-	-
◆ 265/70R16	112S	8.0J	-	-	-	-
◆ 275/70R16	114S	8.0J	-	-	-	-
225/75R16 XL	108S	6.0J	-	-	-	-
235/75R16 XL	112S	6.5J	-	-	-	-
245/75R16	111S	7.0J	-	-	-	-
◆ 265/75R16	116S	7.5J	-	-	-	-
205/80R16 XL	104S	5.5J	-	-	-	-
215/80R16 XL	107S	6.0J	-	-	-	-
235/65R17	104S	7.0J	-	-	-	-
245/65R17	107S	7.0J	-	-	-	-
▲ 255/65R17	110T	7.5J	-	-	-	-
265/65R17	112S	8.0J	-	-	-	-
▲ 245/70R17	110T	7.0J	-	-	-	-
▲ 255/70R17	112T	7.5J	-	-	-	-
▲ 265/70R17	115T	8.0J	-	-	-	-
▲ 285/70R17	117T	8.5J	-	-	-	-
▲ 235/75R17	109T	6.5J	-	-	-	-
▲ 245/75R17	112T	7.0J	-	-	-	-
▲ 255/75R17	115T	7.0J	-	-	-	-
▲ 265/60R18	110T	8.0J	-	-	-	-
▲ 265/65R18	114T	8.0J	-	-	-	-
▲ 275/65R18	116T	8.0J	-	-	-	-
▲ 275/55R20	113T	8.5J	-	-	-	-
▲ 275/60R20	115T	8.0J	-	-	-	-

◆ Available in Q1 2015 ▲ Available in Q2 2015

M+S

RIM SIZE	15 - 20
SERIES	55 - 80
SPEED RATING	S - H

Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions

SL369

Size	LR/PR	Service Index	Standard Rim			dB	
31×10.50R15LT	C/6PR	109Q	8.5J	F	C	73	3
◆ 35×12.50R17LT	E/10PR	121Q	10.0J	-	-	-	-
LT235/75R15	C/6PR	104/101Q	6.5J	F	C	73	3
LT235/75R15	D/8PR	110/107Q	6.5J	F	C	73	3
LT245/70R16	E/10PR	118/115Q	7.0J	F	C	73	3
LT265/70R16	E/10PR	121/118Q	8.0J	F	C	73	3
◆ LT305/70R16	E/10PR	124/121R	9.0J	-	-	-	-
LT225/75R16	E/10PR	115/112Q	6.0J	F	C	73	3
LT245/75R16	E/10PR	120/116Q	7.0J	F	C	73	3
LT265/75R16	E/10PR	123/120Q	7.5J	F	C	73	3
LT285/75R16	D/8PR	122/119Q	8.0J	F	C	73	3
LT285/75R16	E/10PR	126/123Q	8.0J	F	C	73	3
◆ LT315/75R16	E/10PR	127/124R	8.5J	-	-	-	-
LT205/80R16	D/8PR	110/108S	5.5J	F	C	73	3
LT215/85R16	E/10PR	115/112Q	6.0J	F	C	73	3
LT235/85R16	E/10PR	120/116Q	6.5J	F	C	73	3
LT245/70R17	E/10PR	119/116Q	7.0J	F	C	73	3
LT265/70R17	E/10PR	121/118Q	8.0J	F	C	73	3
LT285/70R17	D/8PR	121/118Q	8.5J	F	C	73	3
LT285/70R17	E/10PR	121/118Q	8.5J	F	C	73	3
LT315/70R17	E/10PR	121/118R	9.5J	-	-	-	-
LT245/75R17	E/10PR	121/118Q	7.0J	F	C	73	3
LT235/80R17	E/10PR	120/117Q	6.5J	F	C	73	3
LT275/65R18	E/10PR	123/120Q	8.0J	F	C	73	3
◆ LT275/70R18	E/10PR	125/122S	8.0J	-	-	-	-
◆ LT305/55R20	E/10PR	121/118R	9.5J	-	-	-	-
◆ LT275/65R20	E/10PR	126/123S	8.0J	-	-	-	-

◆ Available in Q1 2015

M+S

RIM SIZE	15 - 20
SERIES	55 - 85
SPEED RATING	Q - S



Benefits and Features

- Wide tread and multi-stepped grooves increase surface area of tread to enhance traction on both on and off roads
- Zig-zag grooves offers efficient water drainage and enhanced traction on wet road
- Large tread blocks help enhanced stability and handling with less noise on highway
- Aggressive sidewall protectors increase off-road bite and prevent damage from sidewall cut and abrasions

SL366

Size	LR/PR	Service Index	Standard Rim			dB	
◆ 205/70R15C	C/6PR	104/102Q	6.0J	-	-	-	-
30×9.50R15LT	C/6PR	104Q	7.5J	-	-	-	-
31×10.50R15LT	C/6PR	109Q	8.5J	-	-	-	-
32×11.50R15LT	C/6PR	113Q	9.0J	-	-	-	-
▲ 33×12.50R15LT	C/6PR	108Q	10.0J	-	-	-	-
▲ 35×12.50R15LT	C/6PR	113Q	10.0J	-	-	-	-
▲ 35×12.50R17LT	E/10PR	121Q	10.0J	-	-	-	-
▲ 37×12.50R17LT	E/10PR	124Q	10.0J	-	-	-	-
LT235/75R15	C/6PR	104/101Q	6.5J	-	-	-	-
LT225/75R16	E/10PR	115/112Q	6.0J	-	-	-	-
LT245/75R16	E/10PR	120/116Q	7.0J	-	-	-	-
LT265/75R16	E/10PR	123/120Q	7.5J	-	-	-	-
◆ LT285/75R16	E/10PR	126/123Q	8.0J	-	-	-	-
◆ LT235/85R16	E/10PR	120/116Q	6.5J	-	-	-	-
▲ LT245/70R17	E/10PR	119/116Q	7.0J	-	-	-	-
◆ LT265/70R17	E/10PR	121/118Q	8.0J	-	-	-	-
▲ LT285/70R17	E/10PR	121/118Q	8.5J	-	-	-	-
▲ LT315/70R17	E/10PR	121/118Q	9.5J	-	-	-	-

◆ Available in Q1 2015 ▲ Available in Q2 2015

M+S

RIM SIZE	15 - 17
SERIES	70 - 85
SPEED RATING	Q

Benefits and Features

- Especially designed for unpaved tough roads (Professional off-road tyres)
- Various shoulder blocks promote driving and handling performance on tough roads
- Perfect grip on tough surfaces such as mud and sand

SL386

Size	LR/PR	Service Index	Standard Rim			dB	
31×10.50R15LT	C/6PR	109Q	8.5J	-	-	-	-
◆ 33×12.50R15LT	C/6PR	108Q	10.0J	-	-	-	-
◆ 35×12.50R17LT	E/10PR	121Q	10.0J	-	-	-	-
◆ 37×12.50R17LT	D/8PR	124Q	10.0J	-	-	-	-
◆ 35×12.50R18LT	E/10PR	123Q	10.0J	-	-	-	-
◆ 33×12.50R20LT	E/10PR	114Q	10.0J	-	-	-	-
35×12.50R20LT	E/10PR	121Q	10.0J	-	-	-	-
LT265/75R16	E/10PR	123/120N	7.5J	-	-	-	-
LT285/75R16	E/10PR	126/123N	8.0J	-	-	-	-
◆ LT315/75R16	E/10PR	127/124Q	8.5J	-	-	-	-
LT265/70R17	E/10PR	121/118Q	8.0J	-	-	-	-
◆ LT285/70R17	E/10PR	121/118Q	8.5J	-	-	-	-
LT315/70R17	E/10PR	121/118Q	9.5J	-	-	-	-
◆ LT245/75R17	E/10PR	121/118Q	7.0J	-	-	-	-
◆ LT235/80R17	E/10PR	120/117Q	8.5J	-	-	-	-
LT275/65R18	E/10PR	123/120Q	8.0J	-	-	-	-

◆ Available in Q1 2015

M+S

RIM SIZE	15 - 20
SERIES	65 - 80
SPEED RATING	N - Q

Benefits and Features

- Premium tyres designed for unpaved tough road (Professional Off-Road tyres)
- Tri-Ply tyre carcass guarantees outstanding performance on any tough road conditions, especially mud and sand surface.
- Robust tread blocks promise excellent traction on unpaved roads.

SL309

Size	LR/PR	Service Index	Standard Rim			dB	
185/75R16C	D/8PR	104/102R	5.0J	E	C	73	3
31×10.50R15LT	C/6PR	109Q	8.5J	E	C	73	3
LT215/75R15	C/6PR	100/97Q	6.0J	E	C	73	3
LT235/75R15	C/6PR	104/101Q	6.5J	E	C	73	3
LT225/75R16	E/10PR	115/112Q	6.0J	E	C	73	3
LT245/75R16	E/10PR	120/116Q	7.0J	E	C	73	3
LT265/75R16	E/10PR	123/120Q	7.5J	E	C	73	3
LT285/75R16	D/8PR	122/119Q	8.0J	E	C	73	3
LT215/85R16	E/10PR	115/112Q	6.0J	E	C	73	3
LT235/85R16	E/10PR	120/116Q	6.5J	E	C	73	3
LT245/70R17	E/10PR	119/116Q	7.0J	E	C	73	3
LT265/70R17	E/10PR	121/118Q	8.0J	E	C	73	3
LT285/70R17	D/8PR	121/118Q	8.5J	E	C	73	3
LT245/75R17	E/10PR	121/118Q	7.0J	E	C	73	3
LT235/80R17	E/10PR	120/117Q	8.5J	E	C	73	3
LT275/65R18	E/10PR	123/120Q	8.0J	E	C	73	3

M+S

RIM SIZE	15 - 18
SERIES	65 - 85
SPEED RATING	Q - R



Benefits and Features

- All-season tread design with long tread life
- Double-ply casing construction handles heavy loads at highway speed and delivers outstanding durability
- Double steel belts plies and double full jointless nylon cap plies improve handling stability and durability
- Wide circumferential grooves helps to evacuate water quickly and efficiently

SC328

Size	LR/PR	Service Index	Standard Rim			dB	
185R14C	D/8PR	102/100Q	5.5J	E	C	72	2
195R14C	D/8PR	106/104Q	5.5J	C	B	72	2
205R14C	D/8PR	109/107R	6.0J	E	C	72	2
215/75R14C	D/8PR	112/110Q	6.0J	E	C	72	2
185R15C	D/8PR	103/102R	5.5J	E	C	72	2
195R15C	D/8PR	106/104R	5.5J	E	C	72	2
195/70R15C	D/8PR	104/102R	6.0J	E	C	72	2
205/70R15C	D/8PR	106/104R	6.0J	E	C	72	2
215/70R15C	D/8PR	109/107R	6.5J	E	C	72	2
225/70R15C	D/8PR	112/110R	6.5J	E	C	72	2
175R16C	C/6PR	98/96Q	5.0J	C	B	72	2
195/65R16C	D/8PR	104/102T	6.0J	C	B	72	2
205/65R16C	D/8PR	107/105T	6.0J	C	B	72	2
215/65R16C	D/8PR	109/107R	6.5J	C	B	72	2
225/65R16C	D/8PR	112/110R	6.5J	C	B	72	2
235/65R16C	D/8PR	115/113R	7.0J	C	B	72	2
◆ **215/70R16C**	C/6PR	108/106T	6.5J	E	C	72	2
195/75R16C	D/8PR	107/105R	5.5J	C	B	72	2

◆ Available in Q1 2015

M+S

RIM SIZE	14 - 16
SERIES	65 - 75
SPEED RATING	Q - T

Benefits and Features

- Wide four ribs improve miles to tread life
- Zig-zag grooves offers enhanced traction on wet road
- Combination construction of polyester casing and steel belts provide outstanding durability

SC301

Size	LR/PR	Service Index	Standard Rim			dB	
185R14C	D/8PR	102/100Q	5.5J	E	C	72	2
195R14C	D/8PR	106/104Q	5.5J	E	C	72	2
205R14C	D/8PR	109/107Q	6.0J	E	C	72	2
205/70R14C	D/8PR	100/97R	6.0J	E	C	72	2
215/75R14C	D/8PR	112/110Q	6.0J	E	C	72	2
185R15C	D/8PR	103/102Q	5.5J	E	C	72	2
205/65R15C	C/6PR	102/100T	6.0J	E	C	72	2
195/70R15C	D/8PR	104/102R	6.0J	E	C	72	2
205/70R15C	C/6PR	104/102S	6.0J	E	C	72	2
215/70R15C	C/6PR	106/104R	6.5J	E	C	72	2
225/70R15C	D/8PR	112/110R	6.5J	E	C	72	2
215/60R16C	D/8PR	108/106T	6.5J	E	C	72	2

M+S

RIM SIZE	14 - 16
SERIES	60 - 70
SPEED RATING	Q - T



Benefits and Features

- Double-ply casing construction handles heavy loads with superior durability
- Heavy duty steel belts plies delivers handling stability and puncture resistance
- Tightly sipes pattern creates self supporting independent tread blocks for even wearing

SL305

Size	LR/PR	Service Index	Standard Rim			dB	
155R12C	C/6PR	83/81Q	4.5B	E	C	72	2
155R12C	D/8PR	88/86Q	4.5B	E	C	72	2
155R13C	D/8PR	90/88S	4.5B	E	C	72	2
165R13C	D/8PR	94/92Q	4.5B	E	C	72	2
175R13C	D/8PR	97/95Q	5.0B	E	C	72	2
165/70R13C	C/6PR	88/86S	5.0B	E	C	72	2
185R14C	D/8PR	102/100Q	5.5J	E	C	72	2
195R14C	D/8PR	106/104Q	5.5J	E	C	72	2
165/70R14C	C/6PR	89/87R	5.0J	E	C	72	2
175/70R14C	C/6PR	95/93S	5.0J	E	C	72	2

M+S

RIM SIZE	12 - 14
SERIES	70 - 80
SPEED RATING	Q - S

Benefits and Features

- Special design for mini-van and compact cars
- Combination construction of polyester casing and steel belts provide outstanding durability
- Long tyre life provides remarkable value for the end users

ST303

Size	LR/PR	Service Index	Standard Rim			dB	
6.50R15	E/10PR	107/105N	5.5F	E	C	72	2
7.00R15	E/10PR	110/106N	5.5F	E	C	72	2
6.50R16	E/10PR	108/107N	5.5F	E	C	72	2
7.00R16	F/12PR	117/116N	5.5F	E	C	72	2

M+S

RIM SIZE	15 - 16
SERIES	-
SPEED RATING	N

Benefits and Features

- Five rib design for improved handling and wet traction
- Combination of polyester casing and steel belts increases durability
- Wide tread width and low-heating compound ensure longer tyre life

ST313

Size	LR/PR	Service Index	Standard Rim			dB	
6.50R15	D/8PR	101/97N	5.5F	E	C	72	2
7.00R15	E/10PR	110/106N	5.5F	E	C	73	3
6.50R16	E/10PR	108/107N	5.5F	E	C	73	3
7.00R16	F/12PR	117/116N	5.5F	E	C	73	3
7.50R16	G/14PR	122/121L	6.0G	E	C	73	3
195/85R16LT	F/12PR	114/112L	5.5J	E	C	73	3
205/85R16LT	F/12PR	117/115L	5.5J	E	C	73	3

M+S

RIM SIZE	15 - 16
SERIES	-
SPEED RATING	L - N

Mileage

Efficiency

Wet Traction

Benefits and Features

- Applicable for mini-bus, van and commercial light trucks
- Strong sidewall design enables high durability and fights off cuts and abrasion in city roads
- Triply polyester belts plies creates strength bearing heavy loads with superior stability

H170

Size	LR/PR	Service Index	Standard Rim			dB	
195R14C	D/8PR	106/104Q	5.5J	F	C	75	3
175/75R16C	D/8PR	101/99Q	5.0J	F	C	75	3
205/75R16C	D/8PR	110/108Q	6.0J	F	C	75	3
215/75R16C	D/8PR	113/111Q	6.0J	F	C	75	3

M+S

RIM SIZE	14 - 16
SERIES	75 - 80
SPEED RATING	Q

Mileage

Efficiency

SW658

Size	Service Index	Standard Rim			dB	
215/75R15	100T	6.0J	*	*	*	*
225/75R15	102T	6.0J	*	*	*	*
235/75R15	105T	6.5J	*	*	*	*
215/65R16	98T	6.5J	*	*	*	*
215/70R16	100T	6.5J	*	*	*	*
265/70R16	112T	8.0J	*	*	*	*
225/45R17	91H	7.5J	*	*	*	*
215/60R17	96T	6.5J	*	*	*	*
225/60R17	99T	6.5J	*	*	*	*
225/65R17	102T	6.5J	*	*	*	*
235/65R17	104T	7.0J	*	*	*	*
265/65R17	112T	8.0J	*	*	*	*
285/60R18	116T	8.5J	*	*	*	*

* To be advised in Q1 2015

M+S

RIM SIZE	15 - 18
SERIES	45 - 75
SPEED RATING	T - H

Benefits and Features

- New studless winter tyres for SUV/CUV vehicles promise excellent performance on snow and wet road surface.
- Special V-shape pattern with solid center rib guarantees outstanding traction on snow, slush and wet road.
- SILICA TECH compound offers remarkable traction and longer tread life.

SW618

Size	Service Index	Standard Rim			dB	
155/65R13	73T	4.5B	F	E	71	3
165/65R13	77T	5.0B	F	E	71	3
165/70R13	79T	5.0B	F	E	71	3
185/60R14	82T	5.5J	F	E	71	3
175/65R14	82T	5.0J	F	E	71	3
185/65R14	86T	5.5J	F	E	71	3
165/70R14	81T	5.0J	F	E	71	3
175/70R14	84T	5.0J	F	E	71	3
185/70R14	88T	5.5J	F	E	71	3
195/55R15	85H	6.0J	F	E	72	3
185/60R15	84T	5.5J	F	E	71	3
195/60R15	88T	6.0J	F	E	72	3
185/65R15	88T	5.5J	F	E	71	3
195/65R15	91T	6.0J	F	E	72	3
205/65R15	94T	6.0J	F	E	72	3
205/70R15	96T	6.0J	F	E	72	3
215/70R15	98T	6.5J	F	E	72	3
205/55R16	91H	6.5J	F	E	72	3
215/55R16	93T	7.0J	F	E	72	3
225/55R16	95T	7.0J	F	E	72	3
205/60R16	92T	6.0J	F	E	72	3
215/60R16	95T	6.5J	F	E	72	3
215/65R16	98T	6.5J	F	E	72	3
225/50R17	94T	7.0J	F	E	72	3
215/55R17	94T	7.0J	F	E	72	3

M+S

RIM SIZE	13 - 17
SERIES	50 - 70
SPEED RATING	T - H

Benefits and Features

- Premium studless winter tyre providing excellent snow, slush and wet traction in cold climates
- Special pattern design to promote aggressive bite in deep snow and wet road conditions
- Superior tread compound keeps rubber flexible for maximum performance in extreme cold temperatures in winter

SW608

Size	Service Index	Standard Rim			dB	
155/70R13	75T	4.5B	E	C	71	2
165/70R13	79T	5.0B	E	C	71	2
175/70R13	82T	5.0B	C	C	71	2
155/80R13	79T	4.5B	E	C	71	2
185/60R14	82H	5.5J	C	C	71	2
155/65R14	75T	4.5B	C	C	71	2
175/65R14	82H	5.0J	E	C	71	2
185/65R14	86H	5.5J	C	C	71	2
165/70R14	81T	5.0J	C	C	71	2
175/70R14	84T	5.0J	E	C	71	2
185/70R14	88T	5.5J	C	C	71	2
195/55R15 XL	89H	6.0J	C	C	72	2
185/60R15 XL	88H	5.5J	C	C	72	2
195/60R15	88H	6.0J	C	C	72	2
175/65R15	84T	5.0J	C	C	71	2
185/65R15	88H	5.5J	C	C	71	2
195/65R15	91H	6.0J	E	C	72	2
205/65R15	94H	6.0J	C	C	72	2
215/70R15	98H	6.5J	C	C	72	2
195/55R16	87H	6.0J	C	C	72	2
205/55R16	91H	6.5J	C	C	72	2
215/55R16 XL	97H	7.0J	C	C	72	2
225/55R16 XL	99H	7.0J	C	C	72	2
205/60R16	92H	6.0J	C	C	72	2
215/60R16 XL	99H	6.5J	C	C	72	2
225/60R16	98H	6.5J	C	C	72	2
215/65R16	98H	6.5J	C	C	72	2
▲ 215/45R17 XL	91V	7.0J	C	C	72	2
225/45R17 XL	94H	7.5J	C	C	72	2
235/45R17 XL	97H	8.0J	C	C	72	2
205/50R17 XL	93H	6.5J	C	C	72	2
225/50R17 XL	98H	7.0J	C	C	72	2
▲ 235/55R17 XL	103V	7.5J	C	C	72	2
▲ 235/65R17 XL	108V	7.0J	C	C	72	2
◆ 225/35R19 XL	88V	8.0J	C	C	72	2

◆ Available in Q1 2015 ▲ Available in Q2 2015

Size	LR/PR	Service Index	Standard Rim			dB	
185R14C	D/8PR	102/100Q	5.5J	C	B	73	2
195/70R15C	D/8PR	104/102R	6.0J	C	B	73	2

M+S

RIM SIZE	13 - 19
SERIES	35 - 80
SPEED RATING	T - V

Ice & Snow
Silent
Efficiency
Silica

Benefits and Features

- V-shaped tread design works with high-drainage groove to drain snow, slush and water quickly
- Optimized direction of sipes maximize the tyre's contact with the road surface and delivers outstanding traction and control in all winter driving conditions
- Special winter tread compound offers performance driving

WINTER

SW601

Size	Service Index	Standard Rim			dB	
165/70R13	79T	5.0B	E	C	71	2
175/70R13	82T	5.0B	C	C	71	2
155/80R13	79T	4.5B	E	C	71	2
185/60R14	82H	5.5J	C	C	71	2
195/60R14	86H	6.0J	C	C	72	2
175/65R14	82H	5.0J	C	C	71	2
185/65R14	86H	5.5J	C	C	71	2
165/70R14	81T	5.0J	C	C	71	2
175/70R14	84T	5.0J	C	C	71	2
185/70R14	88T	5.5J	C	C	71	2
195/70R14	91T	6.0J	C	C	72	2
195/55R15 XL	89H	6.0J	C	C	73	3
185/60R15	84H	5.5J	C	C	71	2
185/60R15 XL	88H	5.5J	C	C	74	3
185/65R15	88H	5.5J	C	C	71	2
195/65R15	91H	6.0J	C	C	72	2
195/65R15 XL	95T	6.0J	C	C	73	3
205/65R15	94H	6.0J	C	C	72	2
205/70R15	96H	6.0J	C	C	72	2
215/70R15	98H	6.5J	C	C	72	2
205/55R16	91H	6.5J	C	C	72	2
215/55R16 XL	97H	7.0J	C	C	73	3
225/55R16 XL	99H	7.0J	C	C	73	3
205/60R16	92H	6.0J	C	C	72	2
215/60R16	95H	6.5J	C	C	72	2
215/60R16 XL	99H	6.5J	C	C	73	3
225/60R16	98H	6.5J	C	C	72	2
215/65R16	98H	6.5J	C	C	72	2
225/45R17 XL	94H	7.5J	C	C	73	3

M+S

RIM SIZE	13 - 17
SERIES	45 - 80
SPEED RATING	T - H

Ice & Snow
Efficiency
Comfortable
Control

Benefits and Features

- Asymmetric tread design provides balanced performance for different driving conditions
- Special zigzag sipes help maintain block rigidity and create more biting edges for enhanced snow and ice traction
- Circumferential high-drainage grooves drain snow, slush, and water, maximizing the tyre's contact with the road surface

WINTER

SW612

Size	LR/PR	Service Index	Standard Rim			dB	
◆ 155R12C	D/8PR	88/86Q	4.5B	E	B	72	2
165R13C	D/8PR	94/93Q	4.5B	E	B	72	2
175R13C	D/8PR	97/95Q	5.0B	E	B	72	2
◆ 185R14C	D/8PR	102/100Q	5.5J	E	B	72	2
205/65R15C	C/6PR	102/100T	6.0J	E	B	72	2
195/70R15C	D/8PR	104/102R	6.0J	E	B	72	2
205/70R15C	D/8PR	106/104R	6.0J	E	B	72	2
215/70R15C	D/8PR	109/107R	6.5J	E	B	72	2
225/70R15C	D/8PR	112/110R	6.5J	E	B	72	2
6.50R16	E/10PR	108/107N	5.5F	E	B	72	2
7.00R16	F/12PR	117/116N	5.5F	E	B	72	2
195/60R16C	C/6PR	99/97T	6.0J	E	B	72	2
195/65R16C	D/8PR	104/102T	6.0J	E	B	72	2
205/65R16C	D/8PR	107/105T	6.0J	E	B	72	2
215/65R16C	D/8PR	109/107R	6.5J	E	B	72	2
225/65R16C	D/8PR	112/110R	6.5J	E	B	72	2
235/65R16C	D/8PR	115/113R	7.0J	E	B	72	2
195/75R16C	D/8PR	107/105R	5.5J	E	B	72	2

◆ Available in Q1 2015

M+S

RIM SIZE	12 - 16
SERIES	60 - 75
SPEED RATING	N - T

Benefits and Features

- All-round winter performance for vans and other commercial vehicles
- Remarkable safety through excellent grip, handling and traction in snow, mud and wet surface
- Comfortable ride and precise handling with long tread life

SW606

Size	Service Index	Standard Rim			dB	
185/60R14	82T	5.5J	-	-	-	-
175/65R14	82H	5.0J	-	-	-	-
185/65R14	86T	5.5J	-	-	-	-
185/70R14	88T	5.5J	-	-	-	-
195/70R14	91T	6.0J	-	-	-	-
185/60R15	84T	5.5J	-	-	-	-
195/60R15	88T	6.0J	-	-	-	-
185/65R15	88T	5.5J	-	-	-	-
195/65R15	91T	6.0J	-	-	-	-
205/65R15	94T	6.0J	-	-	-	-
215/70R15	98T	6.5J	-	-	-	-
205/55R16	91T	6.5J	-	-	-	-
215/55R16 XL	97H	7.0J	-	-	-	-
205/60R16	92T	6.0J	-	-	-	-
215/60R16	95T	6.5J	-	-	-	-
225/60R16	98T	6.5J	-	-	-	-
205/65R16	95T	6.0J	-	-	-	-
215/65R16	98T	6.5J	-	-	-	-
215/70R16	100T	6.5J	-	-	-	-
225/70R16	103T	6.5J	-	-	-	-
235/70R16	106T	7.0J	-	-	-	-
▲ 245/75R16	111T	7.0J	-	-	-	-
▲ 265/75R16	116T	7.5J	-	-	-	-
▲ 215/45R17 XL	91H	7.0J	-	-	-	-
▲ 225/45R17 XL	94H	7.5J	-	-	-	-
205/50R17 XL	93H	6.5J	-	-	-	-
215/50R17 XL	95H	7.0J	-	-	-	-
▲ 225/50R17 XL	98H	7.0J	-	-	-	-
225/55R17 XL	101H	7.0J	-	-	-	-
225/60R17	99T	6.5J	-	-	-	-
225/65R17	102T	6.5J	-	-	-	-
245/65R17	107T	7.0J	-	-	-	-
245/70R17	110T	7.0J	-	-	-	-
265/70R17	115T	8.0J	-	-	-	-

▲ Available in Q2 2015

Size	LR/PR	Service Index	Standard Rim			dB	
▲ 195/70R15C	D/8PR	104/102R	6.0J	-	-	-	-
185/75R16C	D/8PR	104/102R	5.0J	-	-	-	-

▲ Available in Q2 2015

M+S

RIM SIZE	14 - 17
SERIES	45 - 75
SPEED RATING	R - H



Benefits and Features

- Studable V-shaped tread design delivers outstanding traction and braking performance on snow and icy roads
- Stiff shoulder blocks deliver outstanding cornering stability and enhanced grips

EU TYRE LABEL

In 2012 the European Union introduced a new tyre label, in order to provide standardised information on 3 specific performances; fuel efficiency, wet grip and external rolling noise.

Tyre labelling for passenger cars and light trucks took effect from November 2012, for tyres on sale in the EU under European Regulation (EC/No. 1222/2009) which were manufactured after 1 st July 2012.

The label is accompanied on the actual tyre and gives consumers useful information to assist them when purchasing new tyres.

On the right you can find an example of the new EU tyre label. These graphics on the label are similar as those already used for household appliances and more recently new cars.





Rolling Resistance (Fuel Efficiency)

Rolling resistance is one of the main resistive forces on a vehicle, which acts as an opposite force to the direction in which the tyre is rolling. The rolling tyre deforms and dissipates energy. The tyre whose rolling resistance is greater, requires more fuel to move the vehicle forward. Therefore rolling resistance influences fuel consumption and the environment directly.

On the top left of the label, this shows 7 classes which range from A (most efficient)to G (least efficient), the grading indicates the tyre's contribution to fuel efficiency and CO_2 emissions.



Wet Grip (Braking Performance)

Wet grip is one of the most important safety aspects of a tyre. The tyres with excellent grip on wet surfaces have shorter braking distance when driving in rainy weather.

There are other important parameters which are also related to safety. However, consumers will be able to check and select for themselves their preferred performance.

On the top right of the label, wet grip is also expressed in classes ranging from A (highest performance) to G (lowest performance).

External Noise

Traffic noise is a major factor of nuisance and a very relevant environmental issue. On the lower part of the label, this indicates the level of exterior tyre noise from the vehicle (not the internal noise heard by the driver), expressed in decibels. The grading indicates the tyre's contribution to traffic noise and the environment. The label displays sound waves and corresponding levels ranging from 1 (least noise) to 3 (highest noise)

1 sound wave
The best noise level performance.(3 dB below the future European limit*)

2 sound waves
The average performance. (Already compliant with the future European limit*)

3 sound waves
The weakest performance. (Compliant with the current European limit)

* The new European tyre external noise levels will be introduced by 2016

EU Tyre Label Icon Explanation

⊙ = Fuel Efficiency Class on Regulation (EC) No. 122212009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011
♠ = Wet Grip Class on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation IEC) No. 1235/2011
◀ dB = External Rolling Noise Class and Measured Value (d8) on Regulation (EC) No. 1222/2009 amended by Regulation (EC) No. 228/2011 and Regulation (EC) No. 1235/2011

CONSUMER

⊙ = Fuel Efficiency Class ♠ = Wet Grip Class **dB** = See page 33 for detailed information ◀ = External Rolling dB Class and Measured Value

Inch	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⊙	♠	dB	◀
13"	65er	155/65R13	SP06	73T	4.5B	157	532	365	300	F	C	72	3
		155/65R13	H550A	73T	4.5B	157	532	365	300	F	C	72	3
		165/65R13	SP06	77T	5.0B	170	544	412	300	E	C	72	3
		165/65R13	H550A	77T	5.0B	170	544	412	300	F	C	72	3
	70er	155/70R13	RP28	75T	4.5B	157	548	387	300	E	C	70	2
		155/70R13	SP06	75T	4.5B	157	548	387	300	E	C	72	3
		155/70R13	H550A	75T	4.5B	157	548	387	300	F	C	72	3
		165/70R13	RP28	79T	5.0B	170	562	437	300	E	C	70	2
		165/70R13	SP06	79T	5.0B	170	562	437	300	E	C	72	3
		165/70R13	H550A	79T	5.0B	170	562	437	300	F	C	72	3
		175/70R13	RP18	82T	5.0B	177	576	475	300	E	E	70	2
		175/70R13	RP28	82T	5.0B	177	576	475	300	E	C	70	2
		175/70R13	SP06	82T	5.0B	177	576	475	300	E	C	72	3
		175/70R13	H550A	82T	5.0B	177	576	475	300	F	C	72	3
		185/70R13	RP18	86T	5.5J	189	590	530	300	E	E	70	2
		185/70R13	RP28	86T	5.5J	189	590	530	300	E	C	70	2
		185/70R13	SP06	86T	5.5J	189	590	530	300	E	C	72	3
		185/70R13	H550A	86T	5.5J	189	590	530	300	F	C	72	3
	80er	155/80R13	RP18	79T	4.5B	157	578	437	300	E	E	70	2
		155/80R13	RP28	79T	4.5B	157	578	437	300	E	C	70	2
		155/80R13	SP06	79T	4.5B	157	578	437	300	E	C	72	3
		155/80R13	H550A	79T	4.5B	157	578	437	300	F	C	72	3
		165/80R13	RP18	83T	4.5B	165	594	487	300	E	E	70	2
		165/80R13	RP28	83T	4.5B	165	594	487	300	E	C	70	2
		165/80R13	SP06	83T	4.5B	165	594	487	300	E	C	72	3
		165/80R13	H550A	83T	4.5B	165	594	487	300	F	C	72	3
14"	55er	185/55R14	RP28	80V	6.0J	194	560	450	300	E	C	70	2
	60er	165/60R14	RP28	75H	5.0J	170	554	387	300	E	C	70	2
		165/60R14	SP06	75T	5.0J	170	554	387	300	E	C	72	3
		175/60R14	RP28	79H	5.0J	177	566	437	300	E	C	70	2
		185/60R14	RP18	82H	5.5J	189	578	475	300	E	E	70	2
		185/60R14	RP28	82H	5.5J	189	578	475	300	E	C	70	2
		185/60R14	SP06	82H	5.5J	189	578	475	250	E	C	72	3
		185/60R14	H550A	82H	5.5J	189	578	475	300	F	C	72	3
		195/60R14	RP18	86H	6.0J	201	590	530	300	E	E	71	2
		195/60R14	RP28	86H	6.0J	201	590	530	300	C	C	71	2
		195/60R14	SP06	86H	6.0J	201	590	530	300	E	C	74	3
		195/60R14	H550A	86H	6.0J	201	590	530	300	F	C	72	3
		205/60R14	RP28	88H	6.0J	209	602	560	300	C	C	71	2
	65er	155/65R14	RP28	75T	4.5J	157	558	387	300	E	C	70	2
		155/65R14	SP06	75T	4.5B	157	558	387	300	E	C	72	3
		165/65R14	RP28	79T	5.0J	170	570	437	300	E	C	70	2
		175/65R14	RP18	82H	5.0J	177	584	475	300	E	E	70	2
		175/65R14	RP28	82H	5.0J	177	584	475	300	E	C	70	2
		175/65R14	SP06	82H	5.0J	177	584	475	300	E	C	72	3
		175/65R14	H550A	82H	5.0J	177	584	475	300	F	C	72	3
		185/65R14	RP18	86H	5.5J	189	596	530	300	E	E	70	2
		185/65R14	RP28	86H	5.5J	189	596	530	300	C	C	70	2
		185/65R14	SP06	86H	5.5J	189	596	530	300	E	C	72	3
		185/65R14	H550A	86H	5.5J	189	596	530	300	F	C	72	3
		195/65R14	RP28	89H	6.0J	201	610	580	300	C	C	71	2
	70er	165/70R14	RP18	81T	5.0J	170	588	462	300	E	E	70	2
		165/70R14	RP28	81T	5.0J	170	588	462	300	E	C	70	2
		165/70R14	SP06	81T	5.0J	170	588	462	300	E	C	72	3
		165/70R14	H550A	81T	5.0J	170	588	462	300	F	C	72	3
		175/70R14	RP18	84T	5.0J	177	602	500	300	E	E	70	2
		175/70R14	RP28	84T	5.0J	177	602	500	300	C	C	70	2
		175/70R14	SP06	84T	5.0J	177	602	500	300	E	C	72	3
		175/70R14	H550A	84T	5.0J	177	602	500	300	F	C	72	3
		185/70R14	RP18	88T	5.5J	189	616	560	300	E	E	70	2
		185/70R14	RP28	88T	5.5J	189	616	560	300	C	C	70	2
		185/70R14	SP06	88T	5.5J	189	616	560	300	E	C	72	3
		185/70R14	H550A	88T	5.5J	189	616	560	300	F	C	72	3
		195/70R14	RP18	91T	6.0J	201	630	615	300	E	E	71	2
		195/70R14	RP28	91T	6.0J	201	630	615	300	C	C	71	2
		195/70R14	SP06	91T	6.0J	201	630	615	300	E	C	74	3
		195/70R14	H550A	91T	6.0J	201	630	615	300	F	C	72	3
		205/70R14	RP18	95T	6.0J	209	644	690	300	E	E	71	2
		205/70R14	RP28	95T	6.0J	209	644	690	300	C	C	71	2
		205/70R14	SP06	95T	6.0J	209	644	690	300	E	C	74	3
		205/70R14	H550A	95T	6.0J	209	644	690	300	F	C	72	3
	80er	175/80R14	RP18	88T	5.0J	177	636	560	300	E	E	70	2
		175/80R14	SP06	88T	5.0J	177	636	560	300	E	C	72	3
		175/80R14	H550A	88T	5.0J	177	636	560	300	F	C	72	3
		185/80R14	RP18	91T	5.0J	184	652	615	300	E	E	70	2
		185/80R14	SP06	91T	5.0J	184	652	615	300	E	C	72	3
		185/80R14	H550A	91T	5.0J	184	652	615	300	F	C	72	3
15"	50er	195/50R15	SPORTRS	82V	6.0J	201	577	475	300	-	-	-	-
		195/50R15	SA05	82V	6.0J	201	577	475	250	E	C	74	3
		195/50R15	SV308	82V	6.0J	201	577	475	250	C	C	72	3
		195/50R15	RP18	82V	6.0J	201	577	475	300	E	E	71	2
		195/50R15	RP28	82V	6.0J	201	577	475	300	E	C	71	2
		195/50R15	SP06	82V/H	6.0J	201	577	475	250	E	C	74	3
		195/50R15	H550A	82V	6.0J	201	577	475	300	F	C	72	3
		205/50R15 XL	SPORT RS	89V	6.5J	214	587	580	350	-	-	-	-
	55er	185/55R15	SA05	82V	6.0J	194	585	475	250	E	C	74	3
		185/55R15	SV308	82V	6.0J	194	585	475	300	E	C	72	3
		185/55R15	RP28	82V	6.0J	194	585	475	300	E	C	70	2
		195/55R15	SA05	85V	6.0J	201	595	515	250	E	C	74	3
		195/55R15	SV308	85V	6.0J	201	595	515	350	E	C	72	3
		195/55R15	RP18	85V	6.0J	201	595	515	300	E	E	71	2
		195/55R15	RP28	85V	6.0J	201	595	515	300	E	C	71	2
		195/55R15	SP06	85V	6.0J	201	595	515	250	E	C	74	3
		195/55R15	H550A	85V	6.0J	201	595	515	300	F	C	72	3
	60er	175/60R15	RP28	81H	5.0J	177	591	462	300	C	C	70	2
		185/60R15	RP18	84H	5.5J	189	607	500	300	E	E	70	2
		185/60R15	RP28	84H	5.5J	189	605	500	300	C	C	70	2
		185/60R15	SP06	84H	5.5J	189	603	500	300	E	C	72	3
		185/60R15	H550A	84H	5.5J	189	603	500	300	F	C	72	3
		195/60R15	RP18	88H	6.0J	201	615	560	300	E	E	71	2
		195/60R15	RP28	88H	6.0J	201	615	560	300	C	C	71	2
		195/60R15	SP06	88H	6.0J	201	615	560	300	E	C	74	3
		195/60R15	H550A	88H	6.0J	201	615	560	300	F	C	72	3

CONSUMER

⦿ = Fuel Efficiency Class ♠ = Wet Grip Class **dB** = See page 33 for detailed information ◀ = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	♠	dB	◀
15"	60er	205/60R15	RP18	91H	6.0J	209	627	615	300	E	E	71	2
		205/60R15	RP28	91H	6.0J	209	627	615	300	C	C	71	2
		205/60R15	SP06	91H	6.0J	209	627	615	300	E	C	74	3
		205/60R15	H550A	91H	6.0J	209	627	615	300	F	C	72	3
		215/60R15	RP18	94H	6.5J	221	639	670	300	E	E	71	2
		215/60R15	RP28	94H	6.5J	221	639	670	300	C	C	71	2
		215/60R15	SP06	94H	6.5J	221	639	670	300	E	C	74	3
	65er	165/65R15	RP28	81H	5.0J	170	595	462	300	E	C	70	2
		175/65R15	RP28	84H	5.0J	177	609	500	300	C	C	70	2
		185/65R15	RP18	88H	5.5J	189	621	560	300	E	E	70	2
		185/65R15	RP28	88H	5.5J	189	621	560	300	C	C	70	2
		185/65R15	SP06	88H	5.5J	189	621	560	300	E	C	72	3
		185/65R15	H550A	88H	5.5J	189	621	560	300	F	C	72	3
		195/65R15	RP18	91H	6.0J	201	635	615	300	E	E	71	2
		195/65R15	RP28	91H	6.0J	201	635	615	300	C	C	71	2
		195/65R15	SP06	91H	6.0J	201	635	615	300	E	C	74	3
		195/65R15	H550A	91H	6.0J	201	635	615	300	F	C	72	3
		205/65R15	RP18	94H	6.0J	209	647	670	300	C	E	71	2
		205/65R15	RP28	94H	6.0J	209	647	670	300	C	C	71	2
		205/65R15	SP06	94H	6.0J	209	647	670	300	E	C	74	3
		205/65R15	H550A	94H	6.0J	209	647	670	300	F	C	72	3
		205/65R15	SL369	94H	6.0J	209	647	670	300	-	-	-	-
		215/65R15	RP18	96H	6.5J	221	661	710	300	E	E	71	2
		215/65R15	RP28	96H	6.5J	221	661	710	300	C	C	71	2
		215/65R15	SP06	96H	6.5J	221	661	710	300	E	C	74	3
		215/65R15	H550A	96H	6.5J	221	661	710	300	F	C	72	3
	70er	205/70R15	RP18	96H	6.0J	209	669	710	300	C	E	71	2
		205/70R15	RP28	96H	6.0J	209	669	710	300	C	C	71	2
		205/70R15	SP06	96H	6.0J	209	669	710	300	E	C	74	3
		205/70R15	H550A	96H	6.0J	209	669	710	300	F	C	72	3
		205/70R15	SL369	96H	6.0J	209	669	710	300	-	-	-	-
		215/70R15	RP18	98H	6.5J	221	683	750	300	C	E	71	2
		215/70R15	RP28	98H	6.5J	221	683	750	300	C	C	71	2
		215/70R15	SP06	98H	6.5J	221	683	750	300	E	C	74	3
		215/70R15	H550A	98H	6.5J	221	683	750	300	F	C	72	3
		225/70R15	SU318	100T	6.5J	228	697	800	300	E	C	71	2
		235/70R15	SU318	103T	7.0J	240	711	875	300	E	C	71	2
		265/70R15	SU318	112T	8.0J	272	753	1120	300	C	C	72	2
	75er	215/75R15	SU318	100T	6.0J	216	703	800	300	E	C	71	2
		215/75R15	SL369	100S	6.0J	216	703	800	300	-	-	-	-
		225/75R15	SU318	102T	6.0J	223	719	850	300	E	C	71	2
		235/75R15	SU318	105T	6.5J	235	733	925	300	E	C	71	2
		235/75R15 XL	SL369	109S	6.5J	235	733	1030	350	-	-	-	-
		265/75R15	SU318	112T	7.5J	267	779	1120	300	C	C	72	2
16"	45er	195/45R16 XL	SA07	84V	6.5J	195	582	500	350	E	E	72	2
		195/45R16 XL	SA37	84V	6.5J	195	582	500	350	C	B	72	2
		205/45ZR16 XL	SPORTRS	87W	7.0J	206	590	545	350	-	-	-	-
		205/45ZR16 XL	SA05	87W	7.0J	206	590	545	350	E	C	74	3
		205/45ZR16 XL	SV308	87W	7.0J	206	590	545	350	C	C	72	3
	50er	195/50R16	RP28	84V	6.0J	201	602	500	300	E	C	71	2
		205/50R16	SA37	87W	6.5J	214	612	545	300	E	B	71	2
		205/50R16	SA05	87W	6.5J	214	612	545	350	E	C	74	3
		205/50R16	SV308	87W	6.5J	214	612	545	350	C	C	72	3
		205/50R16	RP18	87V	6.5J	214	612	545	300	E	E	71	2
		205/50R16	RP28	87V	6.5J	214	612	545	300	E	C	71	2
		205/50R16	SP06	87V	6.5J	214	612	545	250	E	C	74	3
		205/50R16	H550A	87V	6.5J	214	612	545	300	F	C	72	3
		225/50R16 XL	SPORTRS	89W	7.0J	233	632	710	350	-	-	-	-
		225/50R16	SA37	92W	7.0J	233	632	630	300	E	B	71	2
		225/50R16	SA05	92W	7.0J	233	632	630	350	E	C	74	3
		225/50R16	SV308	92W	7.0J	233	632	630	350	C	C	72	3
	55er	185/55R16	RP28	83V	6.0J	194	610	487	300	E	C	70	2
		195/55R16	RP28	87V	6.0J	201	620	545	300	E	C	71	2
		205/55R16	SA07	91V	6.5J	214	632	615	300	E	E	71	2
		205/55R16	SA37	91V	6.5J	214	632	615	300	E	B	71	2
		205/55R16 XL	SA05	94W	6.5J	214	632	670	350	E	C	74	3
		205/55R16 XL	SV308	94W	6.5J	214	632	670	350	C	C	72	3
		205/55R16	RP18	91V	6.5J	214	632	615	300	E	E	71	2
		205/55R16	RP28	91V	6.5J	214	632	615	300	C	C	71	2
		205/55R16	SP06	91H	6.5J	214	632	615	300	E	C	74	3
		205/55R16	H550A	91H	6.5J	214	632	615	300	F	C	72	3
		215/55R16	SA07	93V	7.0J	226	642	650	300	E	E	71	2
		215/55R16 XL	SA37	97W	7.0J	226	642	730	350	C	B	72	2
		215/55R16 XL	SA05	97W	7.0J	226	642	730	350	E	C	74	3
		215/55R16 XL	SV308	97W	7.0J	226	642	730	350	C	C	72	3
		215/55R16	RP28	93V	7.0J	226	642	650	300	C	C	71	2
		225/55R16	SA07	95W	7.0J	233	654	690	300	E	E	71	2
		225/55R16 XL	SA37	99W	7.0J	233	654	775	350	C	B	72	2
		225/55R16 XL	SA05	99W	7.0J	233	654	775	350	E	C	74	3
		225/55R16 XL	SV308	99W	7.0J	233	654	775	350	C	C	72	3
		225/55R16	RP28	95V	7.0J	233	654	690	300	C	C	71	2
	60er	195/60R16	RP18	89H	6.0J	201	640	580	300	C	E	71	2
		195/60R16	RP28	89H	6.0J	201	640	580	300	C	C	71	2
		205/60R16	RP18	92H	6.0J	209	652	630	300	C	E	71	2
		205/60R16	RP28	92H	6.0J	209	652	630	300	C	C	71	2
		205/60R16	SP06	92H	6.0J	209	652	630	300	E	C	74	3
		205/60R16	H550A	92H	6.0J	209	652	630	300	F	C	72	3
		205/60R16	SL369	92H	6.0J	209	652	630	300	-	-	-	-
		215/60R16	RP18	95H	6.5J	221	664	690	300	C	E	71	2
		215/60R16	RP28	95H	6.5J	221	664	690	300	C	C	71	2
		215/60R16	SP06	95H	6.5J	221	664	690	300	E	C	74	3
		215/60R16	H550A	95H	6.5J	221	664	690	300	F	C	72	3
		225/60R16	RP18	98H	6.5J	228	676	750	300	C	E	71	2
		225/60R16	RP28	98H	6.5J	228	676	750	300	C	C	71	2
		225/60R16	SP06	98H	6.5J	228	676	750	300	E	C	74	3
		225/60R16	H550A	98H	6.5J	228	676	750	300	F	C	72	3
		235/60R16	RP18	100H	7.0J	240	688	800	300	C	E	71	2
		235/60R16	RP28	100H	7.0J	240	688	800	300	C	C	71	2
		235/60R16	SP06	100H	7.0J	240	688	800	300	E	C	74	3
		235/60R16	H550A	100H	7.0J	240	688	875	300	F	C	72	3
	65er	205/65R16	RP18	95H	6.0J	209	672	690	300	E	E	71	2
		205/65R16	RP28	95H	6.0J	209	672	690	300	C	C	71	2
		205/65R16	SP06	95H	6.0J	209	672	690	300	E	C	74	3

CONSUMER

⦿ = Fuel Efficiency Class ♠ = Wet Grip Class **dB** = See page 33 for detailed information ◀ = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	♠	dB	◀
16"	65er	205/65R16	H550A	95H	6.0J	209	672	690	300	F	C	72	3
		215/65R16	RP18	98H	6.5J	221	686	750	300	C	E	71	2
		215/65R16	RP28	98H	6.5J	221	686	750	300	C	C	71	2
		215/65R16	SP06	98H	6.5J	221	686	750	300	E	C	74	3
		215/65R16	H550A	98H	6.5J	221	686	750	300	F	C	72	3
		225/65R16	RP18	100H	6.5J	228	698	800	300	C	E	71	2
		225/65R16	RP28	100H	6.5J	228	698	800	300	C	C	71	2
		225/65R16	SP06	100H	6.5J	228	698	800	300	E	C	74	3
		225/65R16	H550A	100H	6.5J	228	698	800	300	F	C	72	3
		235/65R16	RP18	103H	7.0J	240	712	875	300	C	E	71	2
		235/65R16	RP28	103H	7.0J	240	712	875	300	C	C	71	2
		235/65R16	SP06	103H	7.0J	240	712	875	300	E	C	74	3
		255/65R16	SU318	109T	7.5J	260	738	1030	300	C	C	72	2
	70er	215/70R16	SU318	100H	6.5J	221	708	800	300	E	C	71	2
		215/70R16	SL369	100S	6.5J	221	708	800	300	-	-	-	-
		225/70R16	SU318	103T	6.5J	228	722	875	300	E	C	71	2
		225/70R16	SL369	103S	6.5J	228	722	875	300	-	-	-	-
		235/70R16	SU318	106T	7.0J	240	736	950	300	E	C	71	2
		235/70R16	SL369	106S	7.0J	240	736	950	300	-	-	-	-
		245/70R16 XL	SU318	111T	7.0J	248	750	1090	350	E	C	72	2
		245/70R16 XL	SL369	111S	7.0J	248	750	1090	350	-	-	-	-
		255/70R16	SU318	111T	7.5J	260	764	1090	300	C	C	72	2
		255/70R16	SL369	111T	7.5J	260	764	1090	300	-	-	-	-
		265/70R16	SU318	112T	8.0J	272	778	1120	300	C	C	72	2
		265/70R16	SL369	112S	8.0J	272	778	1120	300	-	-	-	-
		275/70R16	SU318	114T	8.0J	279	792	1180	300	C	C	72	2
		275/70R16	SL369	114S	8.0J	279	792	1180	300	-	-	-	-
	75er	225/75R16	SU318	104T	6.0J	223	744	900	300	E	C	71	2
		225/75R16 XL	SL369	108S	6.0J	223	744	1000	350	-	-	-	-
		235/75R16	SU318	108T	6.5J	235	758	1000	300	E	C	71	2
		235/75R16 XL	SL369	112S	6.5J	235	758	1120	350	-	-	-	-
		245/75R16	SU318	111T	7.0J	248	774	1090	300	E	C	71	2
		245/75R16	SL369	111S	7.0J	248	774	1090	300	-	-	-	-
		265/75R16	SU318	116T	7.5J	267	804	1250	300	C	C	72	2
		265/75R16	SL369	116S	7.5J	267	804	1250	300	-	-	-	-
	80er	205/80R16 XL	SL369	104S	5.5J	203	734	900	350	-	-	-	-
		215/80R16 XL	SL369	107S	6.0J	216	750	975	350	-	-	-	-
17"	40er	205/40ZR17 XL	SA07	84W	7.5J	212	596	500	350	E	E	72	2
		205/40ZR17 XL	SA37	84W	7.5J	212	596	500	350	C	B	72	2
		205/40ZR17 XL	SA05	84W	7.5J	212	596	500	350	E	C	74	3
		205/40ZR17 XL	SV308	84W	7.5J	212	596	500	350	C	C	72	3
		215/40ZR17 XL	SA07	87W	7.5J	218	604	545	350	E	E	72	2
		215/40ZR17 XL	SA37	87W	7.5J	218	604	545	350	C	B	72	2
		215/40ZR17 XL	SA05	87W	7.5J	218	604	545	350	E	C	74	3
		215/40ZR17 XL	SV308	87W	7.5J	218	604	545	350	C	C	72	3
		245/40ZR17 XL	SPORTRS	95W	8.5J	248	628	690	350	-	-	-	-
		245/40ZR17 XL	SA07	95W	8.5J	248	628	690	350	E	E	72	2
	45er	205/45ZR17 XL	SA07	88W	7.0J	206	616	560	350	E	E	72	2
		205/45ZR17 XL	SA37	88W	7.0J	206	616	560	350	C	B	72	2
		205/45ZR17 XL	SA05	88W	7.0J	206	616	560	350	E	C	74	3
		205/45ZR17 XL	SV308	88W	7.0J	206	616	560	350	C	C	72	3
		215/45ZR17 XL	SPORTRS	91W	7.0J	213	626	615	350	-	-	-	-
		215/45ZR17 XL	SA07	91W	7.0J	213	626	615	350	E	E	72	2
		215/45ZR17 XL	SA37	91W	7.0J	213	626	615	350	C	B	72	2
		215/45ZR17 XL	SA05	91W	7.0J	213	626	615	350	E	C	74	3
		215/45ZR17 XL	SV308	91W	7.0J	213	626	615	350	C	C	72	3
		225/45ZR17 XL	SPORTRS	94W	7.5J	225	634	670	350	-	-	-	-
		225/45ZR17 XL	SA07	94W	7.5J	225	634	670	350	E	E	72	2
		225/45ZR17 XL	SA37	94W	7.5J	225	634	670	350	C	B	72	2
		225/45ZR17 XL	SA05	94W	7.5J	225	634	670	350	E	C	74	3
		225/45ZR17 XL	SV308	94W	7.5J	225	634	670	350	C	C	72	3
		235/45ZR17 XL	SPORTRS	97W	8.0J	236	644	730	350	-	-	-	-
		235/45ZR17 XL	SA07	97W	8.0J	236	644	730	350	E	E	72	2
		235/45ZR17 XL	SA37	97W	8.0J	236	644	730	350	C	B	72	2
		235/45ZR17 XL	SA05	97W	8.0J	236	644	730	350	E	C	74	3
		235/45ZR17 XL	SV308	97W	8.0J	236	644	730	350	C	C	72	3
		245/45ZR17	SA07	95Y	8.0J	243	652	690	300	E	E	71	2
		245/45ZR17 XL	SA37	99W	8.0J	243	652	775	350	C	B	72	2
		255/45ZR17	SA07	98W	8.5J	255	662	750	300	E	E	72	2
		255/45ZR17 XL	SA37	102W	8.5J	255	662	850	350	E	B	73	2
	50er	205/50R17	SA07	89W	6.5J	214	638	580	300	E	E	71	2
		205/50R17 XL	SA37	93W	6.5J	214	638	650	350	C	B	72	2
		205/50R17 XL	SA05	93W	6.5J	214	638	650	350	E	C	74	3
		205/50R17 XL	SV308	93W	6.5J	214	638	650	350	C	C	72	3
		215/50R17	SA07	91W	7.0J	226	648	615	300	E	E	71	2
		215/50R17 XL	SA37	95W	7.0J	226	648	690	350	C	B	72	2
		215/50R17 XL	SA05	95W	7.0J	226	648	690	350	E	C	74	3
		215/50R17 XL	SV308	95W	7.0J	226	648	690	350	C	C	72	3
		225/50R17	SA07	94W	7.0J	233	658	670	300	E	E	71	2
		225/50R17 XL	SA37	98W	7.0J	233	658	750	350	E	B	72	2
		225/50R17 XL	SA05	98W	7.0J	233	658	750	350	E	C	74	3
		225/50R17 XL	SV308	98W	7.0J	233	658	750	350	C	C	72	3
		235/50R17 XL	SA07	99W	7.5J	245	668	775	300	E	E	72	2
	55er	215/55R17	SA07	94V	7.0J	226	668	670	300	E	E	71	2
		215/55R17 XL	SA37	98W	7.0J	226	668	750	350	C	B	72	2
		215/55R17 XL	SA05	98W	7.0J	226	668	750	350	E	C	74	3
		215/55R17 XL	SV308	98W	7.0J	226	668	750	350	C	C	72	3
		225/55R17	SA07	97W	7.0J	233	680	730	300	E	E	71	2
		225/55R17 XL	SA37	101W	7.0J	233	680	825	350	C	B	72	2
		225/55R17 XL	SA05	101W	7.0J	233	680	825	350	E	C	74	3
		225/55R17 XL	SV308	101W	7.0J	233	680	825	350	C	C	72	3
		235/55R17	SA07	99W	7.5J	245	690	775	300	E	E	71	2
		235/55R17 XL	SA37	103W	7.5J	245	690	875	350	C	B	72	2
		235/55R17 XL	SA05	103W	7.5J	245	690	875	350	E	C	74	3
		235/55R17 XL	SV308	103W	7.5J	245	690	875	350	C	C	72	3
	60er	215/60R17	SU318	96H	6.5J	221	690	710	300	E	C	71	2
		225/60R17	SU318	99T	6.5J	228	702	775	300	E	C	71	2
		235/60R17	SU318	102T	7.0J	240	714	850	300	E	C	71	2
		255/60R17 XL	SU318	110V	7.5J	260	738	1060	350	C	C	73	2
		265/60R17	SU318	108T	8.0J	272	750	1000	300	C	C	72	2
		275/60R17	SU318	110T	8.0J	279	762	1060	300	C	C	72	2
	65er	215/65R17	SU318	99T	6.5J	221	712	775	300	E	C	71	2
		225/65R17	SU318	102T	6.5J	228	724	850	300	E	C	71	2

CONSUMER

⦿ = Fuel Efficiency Class ♠ = Wet Grip Class **dB** = See page 33 for detailed information ◀ = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	♠	dB	◀
17"	65er	235/65R17	SU318	104T	7.0J	240	738	900	300	E	C	71	2
		235/65R17	SL369	104S	7.0J	240	738	900	300	-	-	-	-
		245/65R17	SU318	107T	7.0J	248	750	975	300	E	C	71	2
		245/65R17	SL369	107S	7.0J	248	750	975	300	-	-	-	-
		255/65R17	SU318	110H	7.5J	260	764	1060	300	C	C	72	2
		255/65R17	SL369	110T	7.5J	260	764	1060	300	-	-	-	-
		265/65R17	SU318	112T	8.0J	272	776	1120	300	C	C	72	2
		265/65R17	SL369	112S	8.0J	272	776	1120	300	-	-	-	-
		275/65R17	SU318	115T	8.0J	279	790	1215	300	C	C	72	2
		285/65R17	SU318	116H	8.5J	292	802	1250	300	C	C	74	2
	70er	245/70R17	SU318	110T	7.0J	248	776	1060	300	E	C	71	2
		245/70R17	SL369	110T	7.0J	248	776	1060	300	-	-	-	-
		255/70R17	SU318	112T	7.5J	260	790	1120	300	C	C	72	2
		255/70R17	SL369	112T	7.5J	260	790	1120	300	-	-	-	-
		265/70R17	SU318	115T	8.0J	272	804	1215	300	C	C	72	2
		265/70R17	SL369	115T	8.0J	272	804	1215	300	-	-	-	-
		285/70R17	SL369	117T	8.5J	292	832	1285	300	-	-	-	-
	75er	235/75R17	SL369	109T	6.5J	235	784	1030	300	-	-	-	-
		245/75R17	SL369	112T	7.0J	248	800	1120	300	-	-	-	-
		255/75R17	SL369	115T	7.0J	255	814	1215	300	-	-	-	-
18"	35er	215/35ZR18 XL	SA07	84W	7.5J	218	607	500	350	E	E	72	2
		215/35ZR18 XL	SA37	87W	7.5J	218	607	545	350	C	B	72	2
		225/35ZR18 XL	SA07	87W	8.0J	230	615	545	350	E	E	72	2
		255/35ZR18 XL	SA07	94W	9.0J	260	635	670	350	E	E	73	2
		255/35ZR18 XL	SA37	94W	9.0J	260	635	670	350	C	B	73	2
		265/35ZR18 XL	SPORTRS	97W	9.5J	271	643	730	350	-	-	-	-
		265/35ZR18 XL	SA07	97W	9.5J	271	643	730	350	E	E	73	2
		285/35ZR18 XL	SPORTRS	101W	10.0J	290	657	825	350	-	-	-	-
	40er	215/40ZR18 XL	SA07	89W	7.5J	218	629	580	350	E	E	72	2
		215/40ZR18 XL	SA37	89W	7.5J	218	629	580	350	C	B	72	2
		225/40ZR18 XL	SA07	92W	8.0J	230	637	630	350	E	E	72	2
		225/40ZR18 XL	SA37	92W	8.0J	230	637	630	350	C	B	72	2
		225/40ZR18 XL	SV308	92W	8.0J	230	637	630	350	E	C	75	3
		235/40ZR18 XL	SPORTRS	95W	8.5J	241	645	690	350	-	-	-	-
		235/40ZR18 XL	SA07	95W	8.5J	241	645	690	350	E	E	72	2
		235/40ZR18 XL	SA37	95W	8.5J	241	645	690	350	C	B	72	2
		235/40ZR18 XL	SA05	95W	8.5J	241	645	690	350	E	C	74	3
		235/40ZR18 XL	SV308	95W	8.5J	241	645	690	350	E	C	75	3
		245/40ZR18 XL	SA07	97Y	8.5J	248	653	730	350	E	E	72	2
	45er	215/45ZR18	SA07	89W	7.0J	213	651	580	300	E	E	71	2
		215/45ZR18 XL	SA37	93W	7.0J	213	651	650	350	C	B	72	2
		225/45ZR18 XL	SA07	95W	7.5J	225	659	690	350	E	E	72	2
		225/45ZR18 XL	SA37	95W	7.5J	225	659	690	350	C	B	72	2
		235/45ZR18	SA07	94Y	8.0J	236	669	670	300	E	E	71	2
		245/45ZR18	SA07	96Y	8.0J	243	677	710	300	E	E	71	2
		245/45ZR18 XL	SA37	100W	8.0J	243	677	800	350	C	B	72	2
	50er	235/50R18 XL	SA07	101W	7.5J	245	693	825	350	E	E	72	2
		235/50R18 XL	SA37	101V	7.5J	245	693	825	350	C	B	72	2
		245/50R18	SA07	100Y	7.5J	253	703	800	300	E	E	71	2
	55er	235/55R18	SU318	100V	7.5J	245	715	800	300	E	C	71	2
		255/55R18 XL	SU318	109V	8.0J	265	737	1030	350	C	C	73	2
		255/55R18	SV308	105H	8.0J	265	737	925	300	E	C	75	3
	60er	225/60R18	SU318	100H	6.5J	228	727	800	300	E	C	71	2
		235/60R18	SU318	103V	7.0J	240	739	875	300	E	C	71	2
		245/60R18	SU318	105T	7.0J	248	751	925	300	E	C	71	2
		255/60R18 XL	SU318	112V	7.5J	260	763	1120	350	C	C	73	2
		265/60R18 XL	SU318	114V	8.0J	272	775	1180	350	C	C	73	2
		265/60R18	SV308	110H	8.0J	272	775	1060	300	E	C	75	3
		265/60R18	SL369	110T	8.0J	272	775	1060	300	-	-	-	-
		285/60R18	SU318	116H	8.5J	292	799	1250	300	C	C	74	2
	65er	235/65R18	SU318	106H	7.0J	240	763	950	300	E	C	71	2
		265/65R18	SU318	114T	8.0J	272	801	1180	300	C	C	72	2
		265/65R18	SL369	114T	8.0J	272	801	1180	300	-	-	-	-
		275/65R18	SU318	116T	8.0J	279	815	1250	300	C	C	72	2
		275/65R18	SL369	116T	8.0J	279	815	1250	300	-	-	-	-
	70er	255/70R18	SU318	113T	7.5J	260	815	1150	300	C	C	72	2
		265/70R18	SU318	116T	8.0J	272	829	1250	300	C	C	72	2
19"	30er	265/30ZR19 XL	SA07	93W	9.5J	271	643	650	350	E	E	73	2
		275/30ZR19 XL	SA07	96W	9.5J	278	649	710	350	E	E	73	2
	35er	215/35ZR19 XL	SA07	85W	7.5J	218	633	515	350	E	E	72	2
		215/35ZR19 XL	SA37	85W	7.5J	218	633	515	350	C	B	72	2
		225/35ZR19 XL	SA07	88W	8.0J	230	641	560	350	E	E	72	2
		225/35ZR19 XL	SA37	88W	8.0J	230	641	560	350	C	B	72	2
		235/35ZR19 XL	SA07	91W	8.5J	241	647	615	350	E	E	72	2
		245/35ZR19 XL	SA07	93W	8.5J	248	655	650	350	E	E	72	2
		255/35ZR19 XL	SA07	96W	9.0J	260	661	710	350	E	E	73	2
	40er	225/40ZR19 XL	SA07	93W	8.0J	230	663	650	350	E	E	72	2
		245/40ZR19	SA07	94Y	8.5J	248	679	670	300	E	E	71	2
		255/40ZR19 XL	SA07	100W	9.0J	260	687	800	350	E	E	73	2
	45er	275/45R19 XL	SU318	108V	9.0J	273	731	1000	350	C	C	73	2
	50er	255/50R19 XL	SU318	107V	8.0J	265	739	975	350	C	C	73	2
	55er	255/55R19 XL	SU318	111V	8.0J	265	763	1090	350	C	C	73	2
20"	30er	245/30ZR20 XL	SV308	90W	8.5J	248	656	600	300	E	C	75	3
	35er	245/35ZR20 XL	SA07	95W	8.5J	248	680	690	350	E	E	72	2
	40er	275/40R20 XL	SU318	106V	9.5J	278	728	950	350	C	C	73	2
	45er	275/45R20 XL	SU318	110V	9.0J	273	756	1060	350	C	C	73	2
		275/45R20 XL	SV308	110H	9.0J	273	756	1060	300	E	C	75	3
	50er	265/50R20 XL	SA07	111V	8.5J	277	774	1090	350	E	E	73	2
		285/50R20	SV308	112H	9.0J	297	794	1120	300	E	C	75	3
	55er	275/55R20 XL	SU318	117V	8.5J	284	810	1285	350	C	C	73	2
		275/55R20 XL	SV308	117H	8.5J	284	810	1285	300	E	C	75	3
		275/55R20	SL369	113T	8.5J	284	810	1150	300	-	-	-	-
	60er	275/60R20	SU318	115H	8.0J	279	838	1215	300	C	C	72	2
		275/60R20	SL369	115T	8.0J	279	838	1215	300	-	-	-	-
22"	35er	265/35R22	SV308	98H	9.5J	271	745	750	300	E	C	75	3
	40er	305/40R22	SV308	110H	11.0J	313	803	1060	300	E	C	75	3
	45er	305/45R22	SV308	118H	10.0J	303	833	1320	300	E	C	75	3
24"	35er	305/35R24	SV308	112H	11.0J	313	824	1120	300	E	C	75	3

COMMERCIAL

⦿ = Fuel Efficiency Class ♠ = Wet Grip Class **dB** = See page 33 for detailed information ◀ = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	♠	dB	◀
12"	80er	155R12C	SL305	C/6PR	83/81Q	4.5B	157	550	487/462	350	E	C	72	2
		155R12C	SL305	D/8PR	88/86Q	4.5B	157	550	560/520	450	E	C	72	2
13"	70er	165/70R13C	SL305	C/6PR	88/86S	5.0B	170	562	560/530	375	E	C	72	2
	80er	155R13C	SL305	D/8PR	90/88S	4.5B	157	578	600/560	450	E	C	72	2
		165R13C	SL305	D/8PR	94/92Q	4.5B	167	596	670/630	450	E	C	72	2
		175R13C	SL305	D/8PR	97/95Q	5.0B	177	610	730/690	450	E	C	72	2
14"	70er	165/70R14C	SL305	C/6PR	89/87R	5.0J	170	588	580/545	375	E	C	72	2
		175/70R14C	SL305	C/6PR	95/93S	5.0J	177	602	690/650	375	E	C	72	2
		205/70R14C	SC301	D/8PR	100/97R	6.0J	209	644	800/730	450	E	C	72	2
	75er	215/75R14C	SC328	D/8PR	112/110Q	6.0J	216	678	1120/1060	475	E	C	72	2
		215/75R14C	SC301	D/8PR	112/110Q	6.0J	216	678	1120/1060	475	E	C	72	2
	80er	185R14C	SC328	D/8PR	102/100Q	5.5J	188	650	850/800	450	E	C	72	2
		185R14C	SC301	D/8PR	102/100Q	5.5J	188	650	850/800	450	E	C	72	2
		185R14C	SL305	D/8PR	102/100Q	5.5J	188	650	850/800	450	E	C	72	2
		195R14C	SC328	D/8PR	106/104Q	5.5J	198	666	950/900	450	C	B	72	2
		195R14C	SC301	D/8PR	106/104Q	5.5J	198	666	950/900	450	E	C	72	2
		195R14C	SL305	D/8PR	106/104Q	5.5J	198	666	950/900	450	E	C	72	2
		195R14C	H170	D/8PR	106/104Q	5.5J	198	666	950/900	450	F	C	75	3
		205R14C	SC328	D/8PR	109/107R	6.0J	208	686	1030/975	450	E	C	72	2
		205R14C	SC301	D/8PR	109/107Q	6.0J	208	686	1030/975	450	E	C	72	2
15"	65er	205/65R15C	SC301	C/6PR	102/100T	6.0J	209	647	850/800	375	E	C	72	2
	70er	195/70R15C	SC328	D/8PR	104/102R	6.0J	201	655	900/850	450	E	C	72	2
		195/70R15C	SC301	D/8PR	104/102R	6.0J	201	655	900/850	450	E	C	72	2
		205/70R15C	SC328	D/8PR	106/104R	6.0J	209	669	950/900	475	E	C	72	2
		205/70R15C	SC301	C/6PR	104/102S	6.0J	209	669	900/850	375	E	C	72	2
		205/70R15C	SL366	C/6PR	104/102Q	6.0J	209	669	900/850	375	-	-	-	-
		215/70R15C	SC328	D/8PR	109/107R	6.5J	221	683	1030/975	450	E	C	72	2
		215/70R15C	SC301	C/6PR	106/104R	6.5J	221	683	950/900	375	E	C	72	2
		225/70R15C	SC328	D/8PR	112/110R	6.5J	228	697	1120/1060	450	E	C	72	2
		225/70R15C	SC301	D/8PR	112/110R	6.5J	228	697	1120/1060	450	E	C	72	2
	75er	LT215/75R15	SL309	C/6PR	100/97Q	6.0J	216	703	800/730	350	E	C	73	3
		LT235/75R15	SL369	C/6PR	104/101Q	6.5J	235	733	900/825	350	F	C	73	3
		LT235/75R15	SL369	D/8PR	110/107Q	6.5J	235	733	1060/975	450	F	C	73	3
		LT235/75R15	SL366	C/6PR	104/101Q	6.5J	235	739	900/825	350	-	-	-	-
		LT235/75R15	SL309	C/6PR	104/101Q	6.5J	235	733	900/825	350	E	C	73	3
	80er	185R15C	SC328	D/8PR	103/102R	5.5J	188	674	875/850	450	E	C	72	2
		185R15C	SC301	D/8PR	103/102Q	5.5J	188	674	875/850	450	E	C	72	2
		195R15C	SC328	D/8PR	106/104R	5.5J	198	690	950/900	450	E	C	72	2
16"	60er	215/60R16C	SC301	D/8PR	108/106T	6.5J	221	664	1000/950	475	E	C	72	2
	65er	195/65R16C	SC328	D/8PR	104/102T	6.0J	201	660	900/850	475	C	B	72	2
		205/65R16C	SC328	D/8PR	107/105T	6.0J	209	672	975/925	475	C	B	72	2
		215/65R16C	SC328	D/8PR	109/107R	6.5J	221	686	1030/975	475	C	B	72	2
		225/65R16C	SC328	D/8PR	112/110R	6.5J	228	698	1120/1060	475	C	B	72	2
		235/65R16C	SC328	D/8PR	115/113R	7.0J	240	712	1215/1150	475	C	B	72	2
	70er	215/70R16C	SC328	C/6PR	108/106	6.5J	221	708	1000/950	375	E	C	72	2
		LT245/70R16	SL369	E/10PR	118/115Q	7.0J	248	750	1320/1215	550	F	C	73	3
		LT265/70R16	SL369	E/10PR	121/118Q	8.0J	272	778	1450/1320	550	F	C	73	3
		LT305/70R16	SL369	E/10PR	124/121R	9.0J	311	834	1600/1450	450	-	-	-	-
	75er	175/75R16C	H170	D/8PR	101/99Q	5.0J	177	668	825/775	475	F	C	75	3
		185/75R16C	SL309	D/8PR	104/102R	5.0J	184	684	900/850	475	E	C	73	3
		195/75R16C	SC328	D/8PR	107/105R	5.5J	196	698	975/925	475	C	B	72	2
		205/75R16C	H170	D/8PR	110/108Q	6.0J	203	714	1060/1000	475	F	C	75	3
		215/75R16C	H170	D/8PR	113/111Q	6.0J	216	728	1150/1090	475	F	C	75	3
		LT225/75R16	SL369	E/10PR	115/112Q	6.0J	223	744	1215/1120	550	F	C	73	3
		LT225/75R16	SL366	E/10PR	115/112Q	6.0J	223	750	1215/1120	550	-	-	-	-
		LT225/75R16	SL309	E/10PR	115/112Q	6.0J	223	744	1215/1120	550	E	C	73	3
		LT245/75R16	SL369	E/10PR	120/116Q	7.0J	248	774	1380/1260	550	F	C	73	3
		LT245/75R16	SL366	E/10PR	120/116Q	7.0J	248	780	1380/1260	550	-	-	-	-
		LT245/75R16	SL309	E/10PR	120/116Q	7.0J	248	774	1380/1260	550	E	C	73	3
		LT265/75R16	SL369	E/10PR	123/120Q	7.5J	267	804	1550/1400	550	F	C	73	3
		LT265/75R16	SL366	E/10PR	123/120Q	7.5J	267	810	1550/1400	550	-	-	-	-
		LT265/75R16	SL386	E/10PR	123/120N	7.5J	267	810	1550/1400	550	-	-	-	-
		LT265/75R16	SL309	E/10PR	123/120Q	7.5J	267	804	1550/1400	550	E	C	73	3
		LT285/75R16	SL369	D/8PR	122/119Q	8.0J	286	834	1500/1360	450	F	C	73	3
		LT285/75R16	SL369	E/10PR	126/123Q	8.0J	286	834	1700/1550	550	F	C	73	3
		LT285/75R16	SL366	E/10PR	126/123Q	8.0J	286	840	1700/1550	550	-	-	-	-
		LT285/75R16	SL386	E/10PR	126/123N	8.0J	286	840	1700/1550	550	-	-	-	-
		LT285/75R16	SL309	D/8PR	122/119Q	8.0J	286	834	1500/1360	450	E	C	73	3
		LT315/75R16	SL369	E/10PR	127/124R	8.5J	313	878	1750/1600	450	-	-	-	-
		LT315/75R16	SL386	E/10PR	127/124Q	8.5J	313	878	1750/1600	450	-	-	-	-
	80er	175R16C	SC328	C/6PR	98/96Q	5.0J	178	684	750/710	375	C	B	72	2
		LT205/80R16	SL369	D/8PR	110/108S	5.5J	203	734	1060/1000	450	F	C	73	3
	85er	195/85R16LT	ST313	F/12PR	114/112L	5.5J	196	738	1180/1120	600	E	C	73	3
		205/85R16LT	ST313	F/12PR	117/115L	5.5J	203	754	1285/1215	600	E	C	73	3
		LT215/85R16	SL369	E/10PR	115/112Q	6.0J	216	772	1215/1120	550	F	C	73	3
		LT215/85R16	SL309	E/10PR	115/112Q	6.0J	216	772	1215/1120	550	E	C	73	3
		LT235/85R16	SL369	E/10PR	120/116Q	6.5J	235	806	1380/1260	550	F	C	73	3
		LT235/85R16	SL366	E/10PR	120/116Q	6.5J	235	812	1380/1260	550	-	-	-	-
		LT235/85R16	SL309	E/10PR	120/116Q	6.5J	235	806	1380/1260	550	E	C	73	3
17"	70er	LT245/70R17	SL369	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	F	C	73	3
		LT245/70R17	SL366	E/10PR	119/116Q	7.0J	248	782	1360/1250	550	-	-	-	-
		LT245/70R17	SL309	E/10PR	119/116Q	7.0J	248	776	1360/1250	550	E	C	73	3
		LT265/70R17	SL369	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	F	C	73	3
		LT265/70R17	SL366	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	-	-	-	-
		LT265/70R17	SL386	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	-	-	-	-
		LT265/70R17	SL309	E/10PR	121/118Q	8.0J	272	804	1450/1320	550	E	C	73	3
		LT285/70R17	SL369	D/8PR	121/118Q	8.5J	292	832	1450/1320	450	F	C	73	3
		LT285/70R17	SL369	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	F	C	73	3
		LT285/70R17	SL366	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	-	-	-	-
		LT285/70R17	SL386	E/10PR	121/118Q	8.5J	292	832	1450/1320	550	-	-	-	-
		LT285/70R17	SL309	D/8PR	121/118Q	8.5J	292	832	1450/1320	450	E	C	73	3
		LT315/70R17	SL369	E/10PR	121/118R	9.5J	323	874	1450/1320	450	-	-	-	-
		LT315/70R17	SL366	E/10PR	121/118Q	9.5J	323	874	1450/1320	450	-	-	-	-
		LT315/70R17	SL386	E/10PR	121/118Q	9.5J	323	874	1450/1320	450	-	-	-	-
	75er	LT245/75R17	SL369	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	F	C	73	3
		LT245/75R17	SL386	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	-	-	-	-
		LT245/75R17	SL309	E/10PR	121/118Q	7.0J	248	800	1450/1320	550	E	C	73	3
	80er	LT235/80R17	SL369	E/10PR	120/117Q	6.5J	235	808	1400/1285	550	F	C	73	3
		LT235/80R17	SL386	E/10PR	120/117Q	8.5J	235	808	1400/1285	550	-	-	-	-
		LT235/80R17	SL309	E/10PR	120/117Q	8.5J	235	808	1400/1285	550	E	C	73	3
18"	65er	LT275/65R18	SL369	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	F	C	73	3
		LT275/65R18	SL386	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	-	-	-	-

COMMERCIAL

⦿ = Fuel Efficiency Class 💧 = Wet Grip Class **dB** = See page 33 for detailed information 🔈 = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	💧	dB	🔈
18"	65er	LT275/65R18	SL309	E/10PR	123/120Q	8.0J	279	815	1550/1400	550	E	C	73	3
	70er	LT275/70R18	SL369	E/10PR	125/122S	8.0J	279	866	1650/1500	550	-	-	-	-
20"	55er	LT305/55R20	SL369	E/10PR	121/118R	9.5J	316	844	1450/1320	450	-	-	-	-
	65er	LT275/65R20	SL369	E/10PR	126/123S	8.0J	279	843	1700/1550	550	-	-	-	-
15"	80er	6.50R15	ST313	D/8PR	101/97N	5.5F	180	730	825/730	460	E	C	72	2
		6.50R15	ST303	E/10PR	107/105N	5.5F	180	730	975/925	560	E	C	72	2
		7.00R15	ST313	E/10PR	110/106N	5.5F	200	750	1060/950	560	E	C	73	3
		7.00R15	ST303	E/10PR	110/106N	5.5F	200	750	1040/915	560	E	C	72	2
16"	80er	6.50R16	ST313	E/10PR	108/107N	5.5F	185	750	1000/975	560	E	C	73	3
		6.50R16	ST303	E/10PR	108/107N	5.5F	185	750	1000/975	560	E	C	72	2
		7.00R16	ST313	F/12PR	117/116N	5.5F	200	775	1230/1170	670	E	C	73	3
		7.00R16	ST303	F/12PR	117/116N	5.5F	200	775	1285/1250	670	E	C	72	2
		7.50R16	ST313	G/14PR	122/121L	6.0G	220	808	1500/1450	740	E	C	73	3
15"		30x9.50R15LT	SL366	C/6PR	104Q	7.5J	240	756	900	350	-	-	-	-
		31x10.50R15LT	SL386	C/6PR	109Q	8.5J	268	781	1030	350	-	-	-	-
		3x10.50R15LT	SL369	C/6PR	109Q	8.5J	268	775	1030	350	F	C	73	3
		31x10.50R15LT	SL366	C/6PR	109Q	8.5J	268	781	1030	350	-	-	-	-
		31x10.50R15LT	SL309	C/6PR	109Q	8.5J	268	775	1030	350	E	C	73	3
		32x11.50R15LT	SL366	C/6PR	113Q	9.0J	290	807	1150	350	-	-	-	-
		33x12.50R15LT	SL386	C/6PR	108Q	10.0J	318	832	1000	250	-	-	-	-
		33x12.50R15LT	SL366	C/6PR	108Q	10.0J	318	832	1000	250	-	-	-	-
		35x12.50R15LT	SL366	C/6PR	113Q	10.0J	318	883	1150	250	-	-	-	-
17"		35x12.50R17LT	SL386	E/10PR	121Q	10.0J	318	883	1450	450	-	-	-	-
		35x12.50R17LT	SL369	E/10PR	121Q	10.0J	318	877	1450	450	-	-	-	-
		35x12.50R17LT	SL366	E/10PR	121Q	10.0J	318	883	1450	450	-	-	-	-
		37x12.50R17LT	SL386	D/8PR	124Q	10.0J	318	934	1600	350	-	-	-	-
		37x12.50R17LT	SL366	E/10PR	124Q	10.0J	318	934	1600	350	-	-	-	-
18"		35x12.50R18LT	SL386	E/10PR	123Q	10.0J	318	883	1550	450	-	-	-	-
20"		33x12.50R20LT	SL386	E/10PR	114Q	10.0J	318	832	1180	450	-	-	-	-
		35x12.50R20LT	SL386	E/10PR	121Q	10.0J	318	883	1450	450	-	-	-	-

WINTER

⦿ = Fuel Efficiency Class 💧 = Wet Grip Class **dB** = See page 33 for detailed information 🔈 = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	💧	dB	🔈
COMMERCIAL														
12"	80er	155R12C	SW612	D/8PR	88/86Q	4.5B	157	550	560/530	450	E	B	72	2
13"	80er	165R13C	SW612	D/8PR	94/93Q	4.5B	165	594	670/650	450	E	B	72	2
		175R13C	SW612	D/8PR	97/95Q	5.0B	177	610	730/690	450	E	B	72	2
14"	80er	185R14C	SW608	D/8PR	102/100Q	5.5J	188	650	850/800	450	C	B	73	2
		185R14C	SW612	D/8PR	102/100Q	5.5J	188	650	850/800	450	E	B	72	2
15"	65er	205/65R15C	SW612	C/6PR	102/100T	6.0J	209	647	850/800	375	E	B	72	2
	70er	195/70R15C	SW612	D/8PR	104/102R	6.0J	201	655	900/850	450	E	B	72	2
		195/70R15C	SW608	D/8PR	104/102R	6.0J	201	655	900/850	450	C	B	73	2
		195/70R15C	SW606	D/8PR	104/102R	6.0J	201	655	900/850	450	-	-	-	-
		205/70R15C	SW612	D/8PR	106/104R	6.0J	209	669	950/900	450	E	B	72	2
		215/70R15C	SW612	D/8PR	109/107R	6.5J	221	683	1030/975	450	E	B	72	2
		225/70R15C	SW612	D/8PR	112/110R	6.5J	228	697	1120/1060	450	E	B	72	2
16"	60er	195/60R16C	SW612	C/6PR	99/97T	6.0J	201	640	775/730	375	E	B	72	2
	65er	195/65R16C	SW612	D/8PR	104/102T	6.0J	201	660	900/850	475	E	B	72	2
		205/65R16C	SW612	D/8PR	107/105T	6.0J	209	672	975/925	475	E	B	72	2
		215/65R16C	SW612	D/8PR	109/107R	6.5J	221	686	1030/975	475	E	B	72	2
		225/65R16C	SW612	D/8PR	112/110R	6.5J	228	698	1120/1060	475	E	B	72	2
		235/65R16C	SW612	D/8PR	115/113R	7.0J	240	712	1215/1150	475	E	B	72	2
	75er	185/75R16C	SW606	D/8PR	104/102R	5.0J	184	684	900/850	475	-	-	-	-
		195/75R16C	SW612	D/8PR	107/105R	5.5J	196	698	975/925	475	E	B	72	2
	80er	6.50R16	SW612	E/10PR	108/107N	5.5F	185	750	1000/975	560	E	B	72	2
		7.00R16	SW612	F/12PR	117/116N	5.5F	200	775	1230/1170	670	E	B	72	2
CONSUMER														
13"	65er	155/65R13	SW618		73T	4.5B	157	532	365	300	F	E	71	3
		165/65R13	SW618		77T	5.0B	170	544	412	300	F	E	71	3
	70er	155/70R13	SW608		75T	4.5B	157	548	387	300	E	C	71	2
		165/70R13	SW618		79T	5.0B	170	562	437	300	F	E	71	3
		165/70R13	SW608		79T	5.0B	170	562	437	300	E	C	71	2
		165/70R13	SW601		79T	5.0B	170	562	437	300	E	C	71	2
		175/70R13	SW608		82T	5.0B	177	576	475	350	C	C	71	2
		175/70R13	SW601		82T	5.0B	177	576	475	350	C	C	71	2
	80er	155/80R13	SW608		79T	4.5B	157	578	437	300	E	C	71	2
		155/80R13	SW601		79T	4.5B	157	578	437	300	E	C	71	2
14"	60er	185/60R14	SW618		82T	5.5J	189	578	475	300	F	E	71	3
		185/60R14	SW608		82H	5.5J	189	578	475	300	C	C	71	2
		185/60R14	SW601		82H	5.5J	189	578	475	350	C	C	71	2
		185/60R14	SW606		82T	5.5J	189	578	475	300	-	-	-	-
		195/60R14	SW601		86H	6.0J	201	590	530	300	C	C	72	2
	65er	155/65R14	SW608		75T	4.5B	157	558	387	300	C	C	71	2
		175/65R14	SW618		82T	5.0J	177	584	475	300	F	E	71	3
		175/65R14	SW608		82H	5.0J	177	584	475	300	E	C	71	2
		175/65R14	SW601		82H	5.0J	177	584	475	350	C	C	71	2
		175/65R14	SW606		82H	5.0J	177	584	475	300	-	-	-	-
		185/65R14	SW618		86T	5.5J	189	596	530	300	F	E	71	3
		185/65R14	SW608		86H	5.5J	189	596	530	350	C	C	71	2
		185/65R14	SW601		86H	5.5J	189	596	530	350	C	C	71	2
		185/65R14	SW606		86T	5.5J	189	596	530	300	-	-	-	-
	70er	165/70R14	SW618		81T	5.0J	170	588	462	300	F	E	71	3
		165/70R14	SW608		81T	5.0J	170	588	462	300	C	C	71	2
		165/70R14	SW601		81T	5.0J	170	588	462	300	C	C	71	2
		175/70R14	SW618		84T	5.0J	177	602	500	300	F	E	71	3
		175/70R14	SW608		84T	5.0J	177	602	500	300	E	C	71	2
		175/70R14	SW601		84T	5.0J	177	602	500	300	C	C	71	2
		185/70R14	SW618		88T	5.5J	189	616	560	300	F	E	71	3
		185/70R14	SW608		88T	5.5J	189	616	560	300	C	C	71	2
		185/70R14	SW601		88T	5.5J	189	616	560	300	C	C	71	2
		185/70R14	SW606		88T	5.5J	189	616	560	300	-	-	-	-
		195/70R14	SW601		91T	6.0J	201	630	615	300	C	C	72	2
		195/70R14	SW606		91T	6.0J	201	630	615	300	-	-	-	-

WINTER

⦿ = Fuel Efficiency Class 💧 = Wet Grip Class **dB** = See page 33 for detailed information 🔈 = External Rolling Noise Class and Measured Value

Inch	Series	Size	Pattern	LR/PR	Service Index	Standard Rim	Section Width (mm)	Overall Diameter (mm)	Max. Load (kg)	Max. Air Pressure (kpa)	⦿	💧	dB	🔈
15"	55er	195/55R15	SW618		85H	6.0J	201	595	515	300	F	E	72	3
		195/55R15 XL	SW608		89H	6.0J	201	595	580	350	C	C	72	2
		195/55R15 XL	SW601		89H	6.0J	201	595	580	350	C	C	73	3
	60er	185/60R15	SW618		84T	5.5J	189	603	500	300	F	E	71	3
		185/60R15 XL	SW608		88H	5.5J	189	603	560	350	C	C	72	2
		185/60R15	SW601		84H	5.5J	189	603	500	300	C	C	71	2
	60er	185/60R15 XL	SW601		88H	5.5J	189	603	560	350	C	C	74	3
		185/60R15	SW606		84T	5.5J	189	603	500	300	-	-	-	-
		195/60R15	SW618		88T	6.0J	201	615	630	300	F	E	72	3
		195/60R15	SW608		88H	6.0J	201	615	560	300	C	C	72	2
		195/60R15	SW606		88T	6.0J	201	615	560	300	-	-	-	-
	65er	175/65R15	SW608		84T	5.0J	177	609	500	300	C	C	71	2
		185/65R15	SW618		88T	5.5J	189	621	560	300	F	E	71	3
		185/65R15	SW608		88H	5.5J	189	621	560	300	C	C	71	2
		185/65R15	SW601		88H	5.5J	189	621	560	350	C	C	71	2
		185/65R15	SW606		88T	5.5J	189	621	560	300	-	-	-	-
		195/65R15	SW618		91T	6.0J	201	635	615	300	F	E	72	3
		195/65R15	SW608		91H	6.0J	201	635	615	300	E	C	72	2
		195/65R15	SW601		91H	6.0J	201	635	615	350	C	C	72	2
		195/65R15 XL	SW601		95T	6.0J	201	635	690	350	C	C	73	3
		195/65R15	SW606		91T	6.0J	201	635	615	300	-	-	-	-
		205/65R15	SW618		94T	6.0J	209	647	670	300	F	E	72	3
		205/65R15	SW608		94H	6.0J	209	647	670	300	C	C	72	2
		205/65R15	SW601		94H	6.0J	209	647	670	350	C	C	72	2
		205/65R15	SW606		94T	6.0J	209	647	670	300	-	-	-	-
	70er	205/70R15	SW618		96T	6.0J	209	669	710	300	F	E	72	3
		205/70R15	SW601		96H	6.0J	209	669	710	350	C	C	72	2
		215/70R15	SW618		98T	6.5J	221	683	750	300	F	E	72	3
		215/70R15	SW608		98H	6.5J	221	683	750	300	C	C	72	2
		215/70R15	SW601		98H	6.5J	221	683	750	350	C	C	72	2
		215/70R15	SW606		98T	6.5J	221	683	750	300	-	-	-	-
	75er	215/75R15	SW658		100T	6.0J	216	703	800	300	-	-	-	-
		225/75R15	SW658		102T	6.0J	223	719	850	300	-	-	-	-
		235/75R15	SW658		105T	6.5J	235	733	925	300	-	-	-	-
16"	55er	195/55R16	SW608		87H	6.0J	201	620	545	300	C	C	72	2
		205/55R16	SW618		91H	6.5J	214	632	615	300	F	E	72	3
		205/55R16	SW608		91H	6.5J	214	632	615	300	C	C	72	2
		205/55R16	SW601		91H	6.5J	214	632	615	350	C	C	72	2
		205/55R16	SW606		91T	6.5J	214	632	615	300	-	-	-	-
		215/55R16	SW618		93T	7.0J	226	642	650	300	F	E	72	3
		215/55R16 XL	SW608		97H	7.0J	226	642	730	350	C	C	72	2
		215/55R16 XL	SW601		97H	7.0J	226	642	730	300	C	C	73	3
		215/55R16 XL	SW606		97H	7.0J	226	642	730	350	-	-	-	-
		225/55R16	SW618		95T	7.0J	233	654	690	300	F	E	72	3
		225/55R16 XL	SW608		99H	7.0J	233	654	775	350	C	C	72	2
		225/55R16 XL	SW601		99H	7.0J	233	654	775	350	C	C	73	3
	60er	205/60R16	SW618		92T	6.0J	209	652	630	300	F	E	72	3
		205/60R16	SW608		92H	6.0J	209	652	630	300	C	C	72	2
		205/60R16	SW601		92H	6.0J	209	652	630	300	C	C	72	2
		205/60R16	SW606		92T	6.0J	209	652	630	300	-	-	-	-
		215/60R16	SW618		95T	6.5J	221	664	690	300	F	E	72	3
		215/60R16 XL	SW608		99H	6.5J	221	664	775	350	C	C	72	2
		215/60R16	SW601		95H	6.5J	221	664	690	300	C	C	72	2
		215/60R16 XL	SW601		99H	6.5J	221	664	775	350	C	C	73	3
		215/60R16	SW606		95T	6.5J	221	664	690	300	-	-	-	-
		225/60R16	SW608		98H	6.5J	228	676	750	300	C	C	72	2
		225/60R16	SW601		98H	6.5J	228	676	750	350	C	C	72	2
		225/60R16	SW606		98T	6.5J	228	676	750	300	-	-	-	-
	65er	205/65R16	SW606		95T	6.0J	209	672	690	300	-	-	-	-
		215/65R16	SW658		98T	6.5J	221	686	750	300	-	-	-	-
		215/65R16	SW618		98T	6.5J	221	686	750	300	F	E	72	3
		215/65R16	SW608		98H	6.5J	221	686	750	300	C	C	72	2
		215/65R16	SW601		98H	6.5J	221	686	750	300	C	C	72	2
		215/65R16	SW606		98T	6.5J	221	686	750	300	-	-	-	-
	70er	215/70R16	SW658		100T	6.5J	221	708	800	300	-	-	-	-
		215/70R16	SW606		100T	6.5J	221	708	800	300	-	-	-	-
		225/70R16	SW606		103T	6.5J	228	722	875	300	-	-	-	-
		235/70R16	SW606		106T	7.0J	240	736	950	300	-	-	-	-
		265/70R16	SW658		112T	8.0J	272	778	1120	300	-	-	-	-
	75er	245/75R16	SW606		111T	7.0J	248	774	1090	300	-	-	-	-
		265/75R16	SW606		116T	7.5J	267	804	1250	300	-	-	-	-
17"	45er	215/45R17 XL	SW608		91V	7.0J	213	626	615	350	C	C	72	2
		215/45R17 XL	SW606		91H	7.0J	213	626	615	350	-	-	-	-
		225/45R17	SW658		91H	7.5J	225	634	615	300	-	-	-	-
		225/45R17 XL	SW608		94H	7.5J	225	634	670	350	C	C	72	2
		225/45R17 XL	SW601		94H	7.5J	225	634	670	300	C	C	73	3
		225/45R17 XL	SW606		94H	7.5J	225	634	670	350	-	-	-	-
		235/45R17 XL	SW608		97H	8.0J	236	644	730	350	C	C	72	2
	50er	205/50R17 XL	SW608		93H	6.5J	214	638	650	350	C	C	72	2
		205/50R17 XL	SW606		93H	6.5J	214	638	650	350	-	-	-	-
		215/50R17 XL	SW606		95H	7.0J	226	648	690	350	-	-	-	-
		225/50R17	SW618		94T	7.0J	233	658	670	300	F	E	72	3
		225/50R17 XL	SW608		98H	7.0J	233	658	750	350	C	C	72	2
		225/50R17 XL	SW606		98H	7.0J	233	658	750	350	-	-	-	-
	55er	215/55R17	SW618		94T	7.0J	226	668	670	300	F	E	72	3
		225/55R17 XL	SW606		101H	7.0J	233	680	825	350	-	-	-	-
		235/55R17 XL	SW608		103V	7.5J	245	690	875	350	C	C	72	2
	60er	215/60R17	SW658		96T	6.5J	221	690	710	300	-	-	-	-
		225/60R17	SW658		99T	6.5J	228	702	775	300	-	-	-	-
		225/60R17	SW606		99T	6.5J	228	702	775	300	-	-	-	-
	65er	225/65R17	SW658		102T	6.5J	228	724	850	300	-	-	-	-
		225/65R17	SW606		102T	6.5J	228	724	850	300	-	-	-	-
		235/65R17	SW658		104T	7.0J	240	738	900	300	-	-	-	-
		235/65R17 XL	SW608		108V	7.0J	240	738	1000	350	C	C	72	2
		245/65R17	SW606		107T	7.0J	248	750	975	300	-	-	-	-
		265/65R17	SW658		112T	8.0J	272	776	1120	300	-	-	-	-
	70er	245/70R17	SW606		110T	7.0J	248	776	1060	300	-	-	-	-
		265/70R17	SW606		115T	8.0J	272	804	1215	300	-	-	-	-
18"	60er	285/60R18	SW658		116T	8.5J	292	799	1250	300	-	-	-	-
19"	35er	225/35R19 XL	SW608		88V	8.0J	230	641	560	350	C	C	72	2

TYRE SIZE KNOWLEDGE

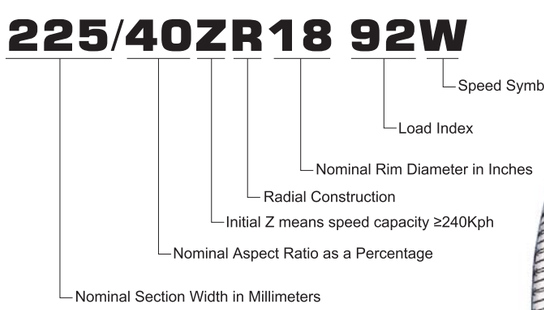

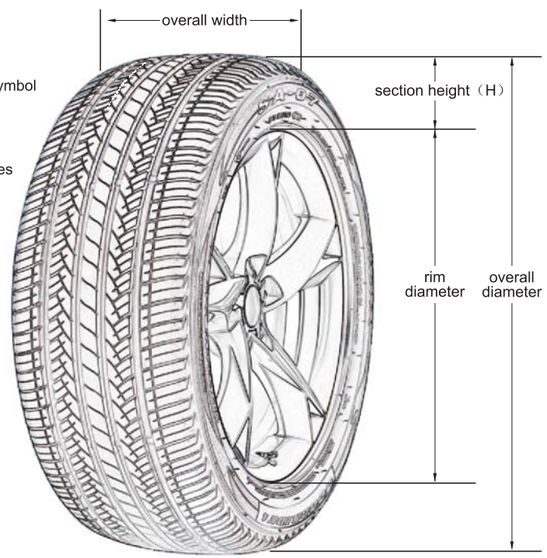

Aspect ratio (%) = $\frac{\text{Section Height}}{\text{Section Width}} \times 100$

SIDEWALL INSTRUCTION：

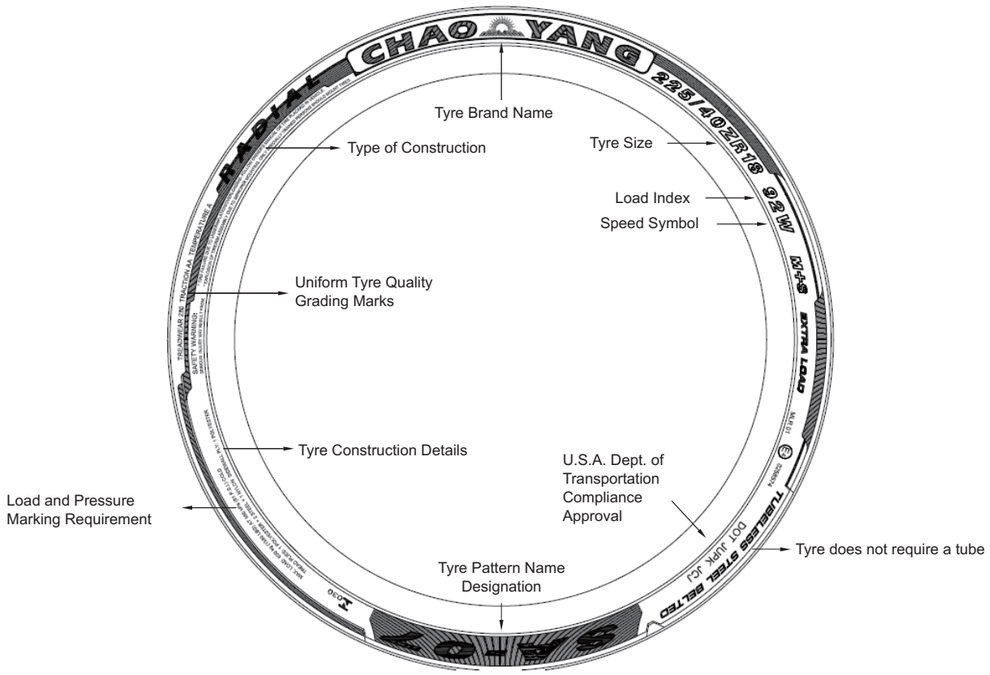

OTHER MARKINGS:

P - as part of the tyre size designation (e.g., P205/65R15) used to indicate tyres intended for services on passenger cars.
LT - as part of the size designation (e.g., LT235/75R15) used to indicate the tyres are intended for light truck vehicles.
M&S - letters used to indicate a tyre suitable for Mud and Snow and/or All Season usage.
XL - as part of the size designation (e.g., P235/75R16 XL) used to indicate the tyre can carry more loads as the maximum inflation pressure and load are greater than a standard load version. (Also could be called REINFORCED or RF).
ZR - as part of the tyre size designation (e.g. 225/45ZR17 XL) used to indicate the tyre has a maximum speed over 240 kilometer per hour.

SPEED RATING

The speed symbol refers to the maximum speed capabilities of the tyre. It is only valid for tyres that are properly inflated and loaded within their assigned load index.

Speed Rating	L	N	P	Q	R	S	T	U	H	V	W	Y	ZR
Max. Kph. (Kilometer/hour)	120	140	150	160	170	180	190	200	210	240	270	300	≥240

LOAD INDEX

The load index is the maximum load-carrying capacity of a tyre under a specific condition.

Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS	Load Index	KG	LBS
50	190	420	70	335	740	90	600	1320	110	1060	2340	130	1900	4180
51	195	430	71	345	760	91	615	1360	111	1090	2400	131	1950	4300
52	200	440	72	355	785	92	630	1390	112	1120	2470	132	2000	4400
53	206	455	73	365	805	93	650	1430	113	1150	2540	133	2060	4540
54	212	465	74	375	825	94	670	1480	114	1180	2600	134	2120	4680
55	218	480	75	387	855	95	690	1520	115	1215	2680	135	2180	4800
56	224	495	76	400	880	96	710	1570	116	1250	2760	136	2240	4940
57	230	505	77	412	910	97	730	1610	117	1285	2830	137	2300	5080
58	236	520	78	425	935	98	750	1650	118	1320	2910	138	2360	5200
59	243	535	79	437	965	99	775	1710	119	1360	3000	139	2430	5360
60	250	550	80	450	990	100	800	1760	120	1400	3080	140	2500	5520
61	257	565	81	462	1020	101	825	1820	121	1450	3200	141	2575	5680
62	265	585	82	475	1050	102	850	1870	122	1500	3300	142	2650	5840
63	272	600	83	487	1070	103	875	1930	123	1550	3420	143	2725	6000
64	280	615	84	500	1100	104	900	1980	124	1600	3520	144	2800	6150
65	290	640	85	515	1140	105	925	2040	125	1650	3640	145	2900	6400
66	300	660	86	530	1170	106	950	2090	126	1700	3740	146	3000	6600
67	307	675	87	545	1200	107	975	2150	127	1750	3860	147	3075	6800
68	315	695	88	560	1230	108	1000	2200	128	1800	3960	148	3150	6950
69	325	715	89	580	1280	109	1030	2270	129	1850	4080	149	3250	7150